


allure[®]
ISOCORE

ISOSTONE FLOOR & WALL TILES

Featuring  **ISOCORE** Technology[®]



- ◆ CAN BE INSTALLED OVER CERAMIC TILES WITH GROOVES
- ◆ SOUND INSULATING UNDERLAYER

ISOSTONE WALL TILES



Floor: MS40214 Scratch Concrete Brown
Wall: MW645112 Concrete Light Grey

CREATIVE WALL DESIGN AND INNOVATIVE INSTALLATION SUITABLE FOR ALL WALLS

Quick Installation

Its lightweight structure allows for easy installation on all surfaces. No clicking, drilling or substructures needed for installation. Simply stick on the wall elements.

Authentic Surface Textures

Isostone Wall Tiles come with authentic surfaces that match each decor.

Extremely Light and Durable

Heavy is not always necessarily strong or durable. Due to its patented Isocore technology, Isocore is both light and strong.

Dirt Resistant

Ceramic bead coating makes wall tiles resistant to dirt and very easy to clean

100 % Waterproof

Isostone wall tiles are entirely waterproof, which means they can be installed in bathrooms and easily cleaned with running water.

Suitable for All Surfaces

Does not require special substructures, can even be installed over existing ceramic tiles

High Stability

Rigid Isocore technology allows Isostone tiles to be highly stable. This allows for covering of 90° corners and uneven surfaces perfectly.

Easy & Clean Cutting

Lightweight and rigid formula allows for clean cuts on installation sight, even with standard tools; saving time and money on labor.

15 YEAR GUARANTEE
DOMESTIC

10 YEAR GUARANTEE
COMMERCIAL

ISOSTONE WALL TILES

allure[®]
ISOCORE



White Marble MW47911



Scratch Concrete Brown MW40214




Concrete White MW645115



Concrete Light Grey MW645112

ISOSTONE FLOOR TILES

Featuring  ISOCORE Technology®

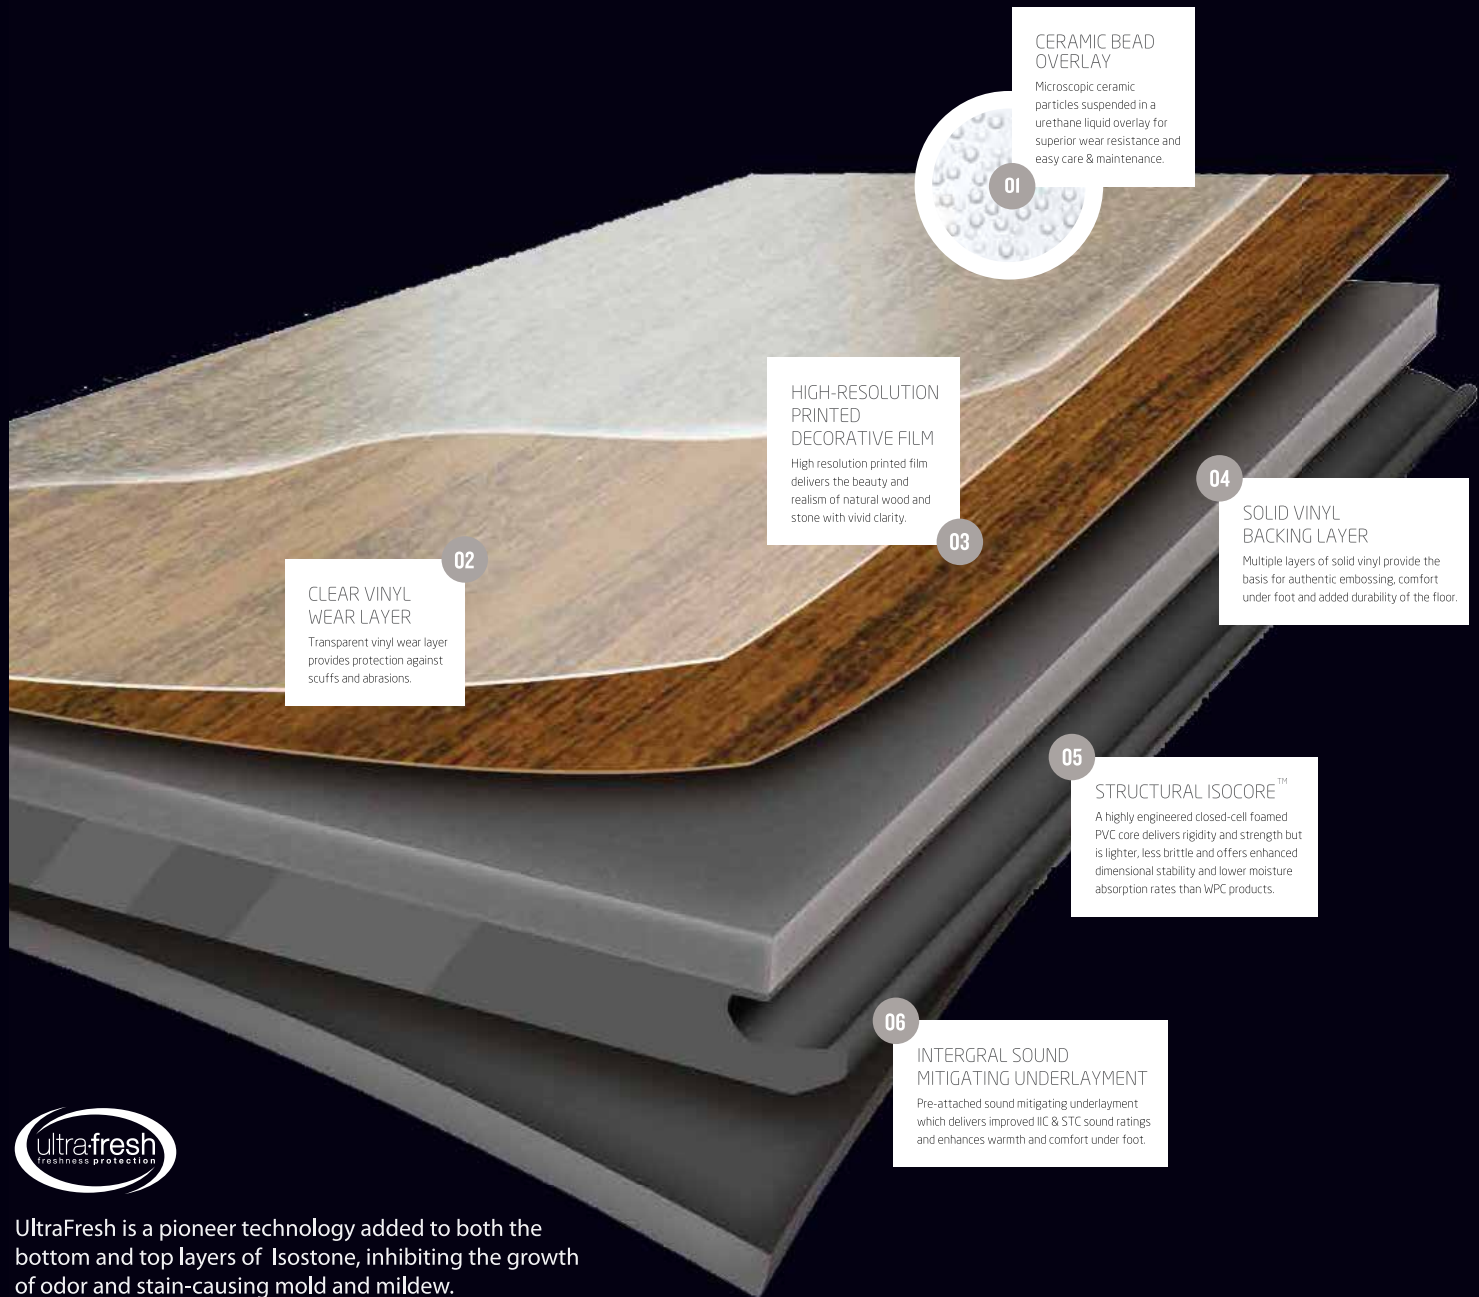

01 CERAMIC BEAD OVERLAY

Microscopic ceramic particles suspended in a urethane liquid overlay for superior wear resistance and easy care & maintenance.

03 HIGH-RESOLUTION PRINTED DECORATIVE FILM

High resolution printed film delivers the beauty and realism of natural wood and stone with vivid clarity.

02 CLEAR VINYL WEAR LAYER

Transparent vinyl wear layer provides protection against scuffs and abrasions.

04 SOLID VINYL BACKING LAYER

Multiple layers of solid vinyl provide the basis for authentic embossing, comfort under foot and added durability of the floor.

05 STRUCTURAL ISOCORE™

A highly engineered closed-cell foamed PVC core delivers rigidity and strength but is lighter, less brittle and offers enhanced dimensional stability and lower moisture absorption rates than WPC products.

06 INTERGRAL SOUND MITIGATING UNDERLAYMENT

Pre-attached sound mitigating underlayment which delivers improved IIC & STC sound ratings and enhances warmth and comfort under foot.



UltraFresh is a pioneer technology added to both the bottom and top layers of Isostone, inhibiting the growth of odor and stain-causing mold and mildew.

THE MOST INNOVATIVE AND LUXURIOUS VINYL FLOORING

STRONGER

Isocore is stronger than other types of vinyl plank and tile flooring. It will stand up to the threats posed by water, temperature and humidity.

LIGHTER

Heavy is not always necessarily strong or durable. Due to its patented Isocore technology, Isocore is both light and strong.

QUIETER

Whether it is for your working or living environment, you want sound improvement properties. Isocore offers quiet comfort together with its structurally integrated sublayer.

STRAIGHTER & MORE STABLE

Straight and strong by nature, Isocore simply excels at dimensional stability.

SAFER COMFORT

Strong can be soft. Isocore provides comfort together with safety.

MORE HYGIENIC

Completely sealed by Ultrafresh on the top, sides and bottom, Isocore does not allow bacteria, mites, mildew, fungus and other undesirables to inhabit your flooring.

EASIER TO INSTALL

Isocore requires less sub-floor preparation and less acclimatisation time. Isocore also allows larger size plank and tile format installations due to its light weight and rigid nature.






Concrete White MS645115



Modern Slate Black MS650105

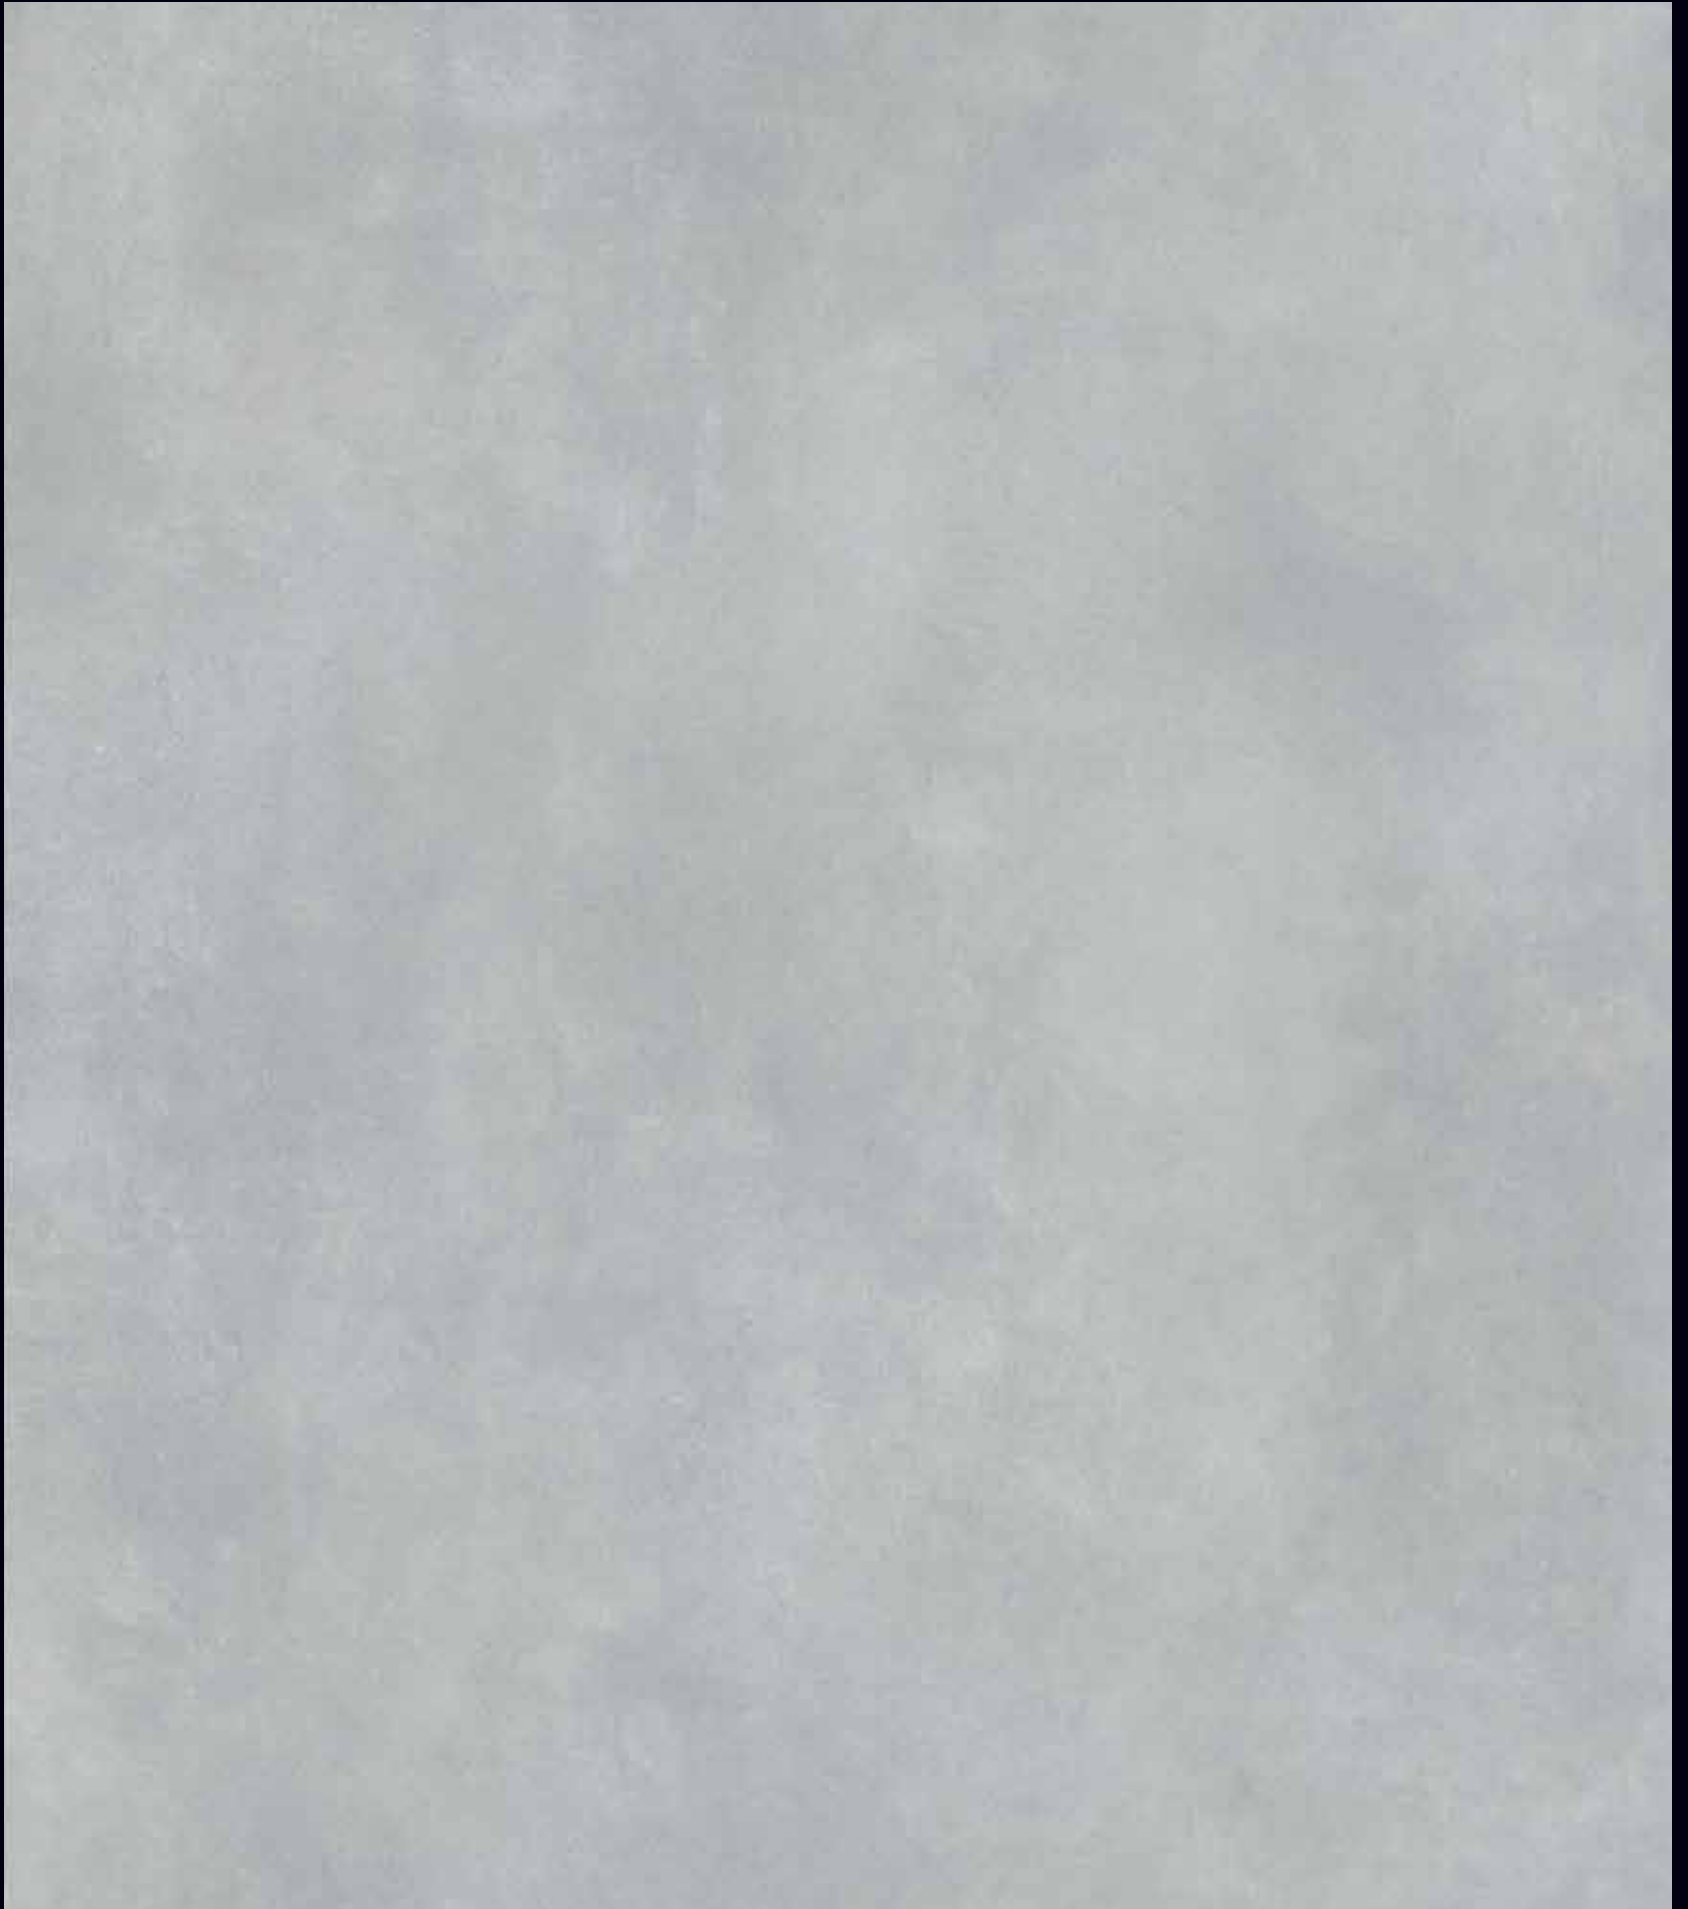

ISOSTONE FLOOR TILES

15 YEAR GUARANTEE
DOMESTIC

10 YEAR GUARANTEE
COMMERCIAL



Arctic Marble MS47915




Scratch Concrete Brown MS40214

ISOSTONE FLOOR TILES

15 YEAR GUARANTEE
DOMESTIC

10 YEAR GUARANTEE
COMMERCIAL

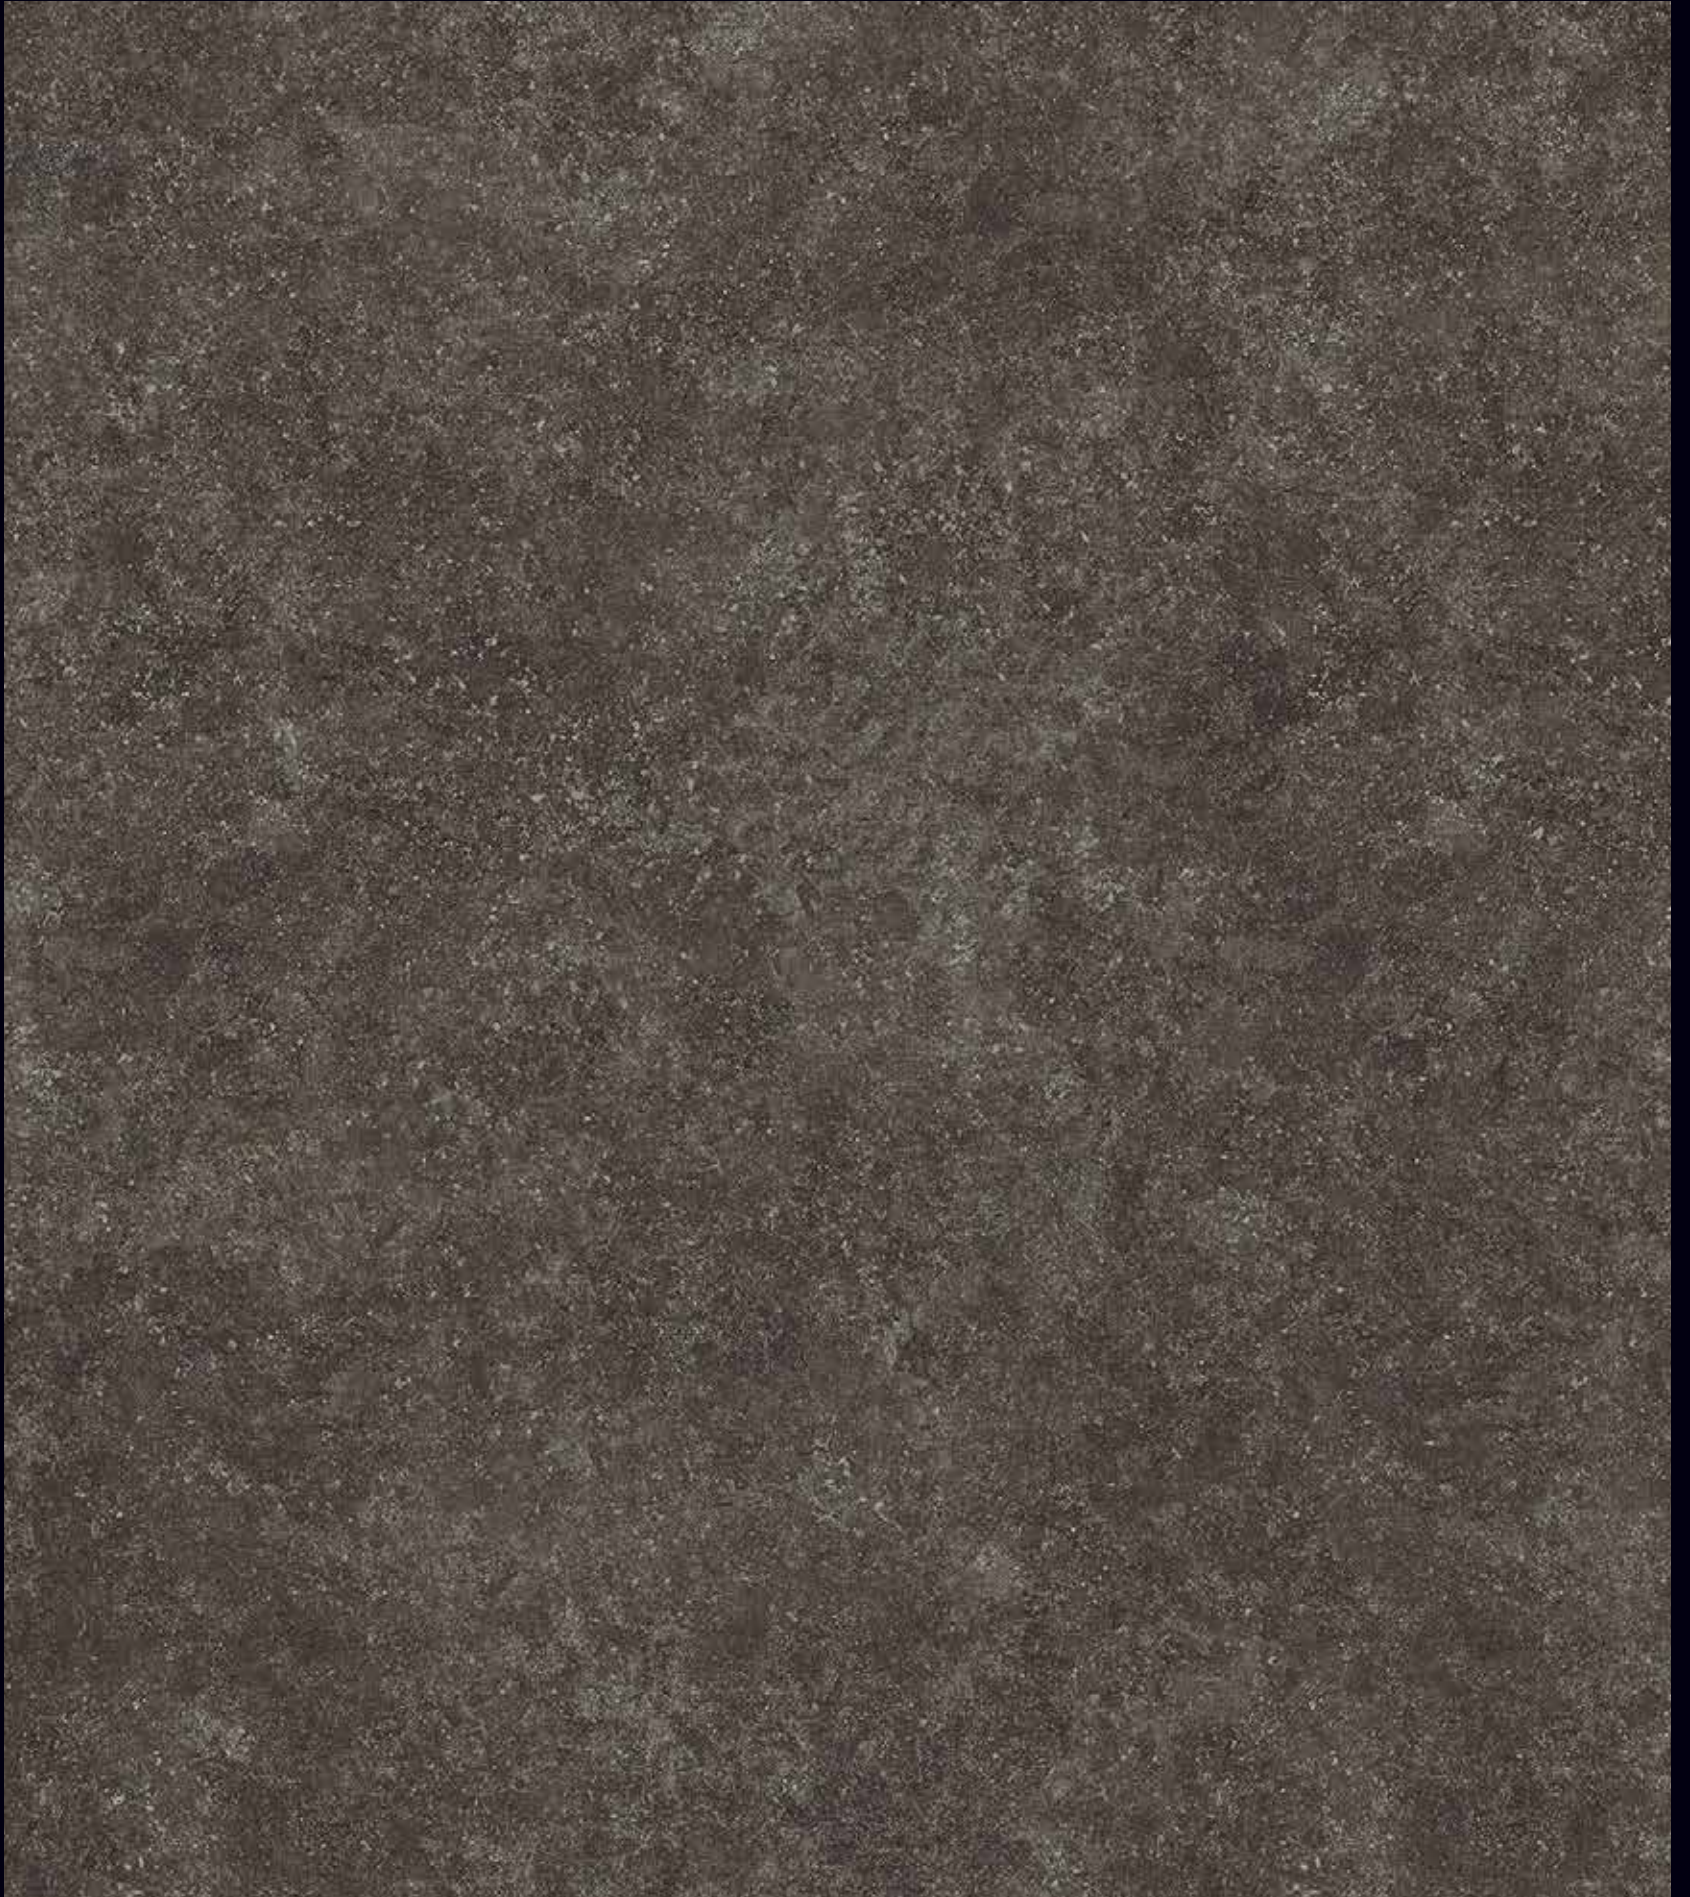

Starry Night Polaris MS442110















Starry Night Pegasus MS442101



Starry Night Cepheus MS442107

ISOSTONE FLOOR & WALL TILES

Description	Standard	Symbol	Results
Total Thickness	8 mm		
Construction	2 mm LVT + 4 mm ISOCORE + 2 mm IXPE		
Wearlayer	0.55 mm		
Size	Floor: 406.88 mm x 812.80 mm / Wall 457.20 mm x 914.40 mm		
Edge Detail	Micro-Bevel Edge		
Coating	Urethane with Enhanced Ceramic Bead		
Treatment	Ultrafresh		
m2/carton	Floor: 1.982 m ² / Wall: 3.35 m ²		
Limited Warranty	10 Year Commercial / 15 Year Residential		
Classification	EN 16511		Commercial - Heavy (Class 33) Industrial - General (Class 42)
Reaction to Fire	EN13501-1		B _f -s1 Classification
Content of PCP			< 5 ppm PASS
Formaldehyde Emission	EN 717-1		Class E1
Slip Resistance (Dry)	EN 13893		Class DS
Slip Resistance (Wet)	DIN 51130		Grade R10
Thermal Resistance	EN 12664		0.08800 m ² K/W at 10°C
Static Electrical Propensity	EN EN 1815		Average: -6.8 kV SURPASS
Impact Sound Insulation	EN ISO 140-8		ΔL _w = 18 dB
Castor Chair Resistance	EN 425		PASS
Effect of Furniture Leg	EN 424		PASS
Residual Indentation	EN ISO 24343-1		≤ 0.2 mm SURPASS
Dimensional Stability	EN ISO 239999		≤ 0.25% SURPASS

- ◆ CAN BE INSTALLED OVER CERAMIC TILES WITH GROOVES
- ◆ SOUND INSULATING UNDERLAYER
- ◆ 2 MM LVT + 4MM ISOCORE + 2MM UNDERLAYER (TOTAL 8MM THICKNESS)
- ◆ LUXURY TILE SIZE 406,40 MM X 812,80 MM

