



Web: <u>fixitdesign.ae</u> Phone: <u>+971554722980</u> Email: <u>info@fixitdesign.ae</u>





Black Pitch 150325



Suffolk Stone 150305




White 150101



Moles Paw 150302






Silver 150300



London 150120

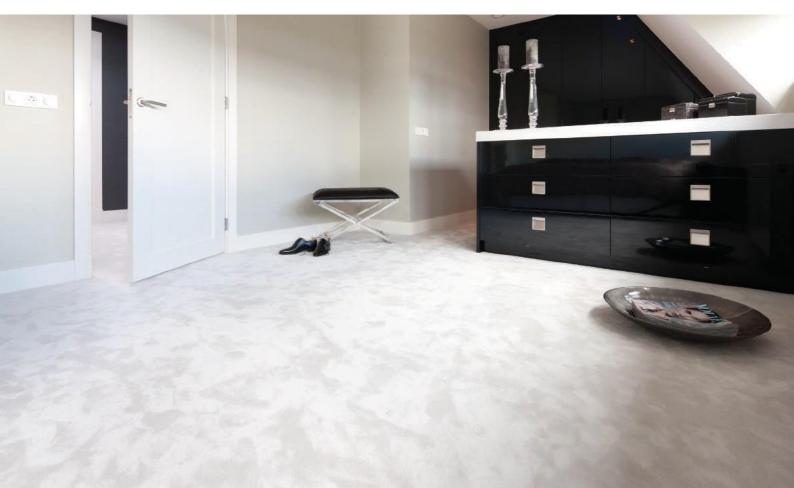








Marsala 150236



Charlston 150112



Ochre 150204



Chalk 150108



Rust 150248



Elephant 150105











NavyBlue 150425



Patrol 150412

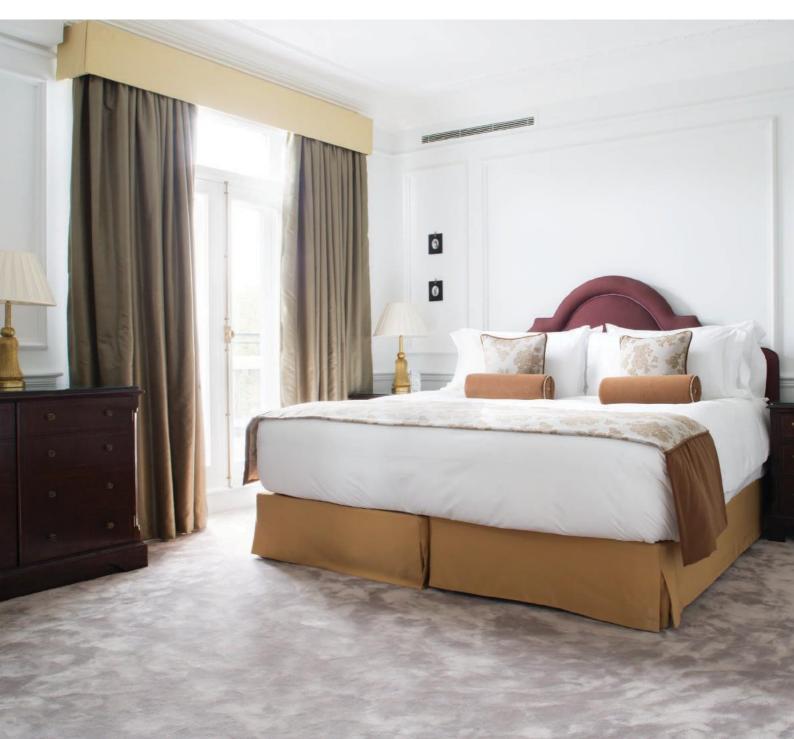





## Specification

Construction Pile Material Secondary Backing Pile Weight Total Weight Carpet Thickness Usage Classification EN 1307:2014 Comfort rating EN1307:2014 Static Electricity Charge Light ISO 105 B02:2013 Rubbing - Dry ISO 105 X12 Rubbing - Wet ISO 105 X12 Water ISO 105 E01 : 2013 Water Stains En1307 / EN15115 **TOG** rating Burn Behaviour BS EN ISO 9239-1:2002 Stair Suitability Widths Cut Length service Standard Rug sizes

Bespoke Rug service

: Tufted 1/10 cut pile

: Faux Silk

- : Luxury Backing
- : ca. 1.85 kg / sq mtr +/-7.5%
- : ca. 2.60 kg / sq mtr +/- 7.5%
- : ca. 14 mm +/-7.5%
- : Class 33 / Heavy Commercial use
- : LC5
- : Anti static
- : 5-6
- : 4-5
- : 4-5
- : 4-5
- : 1.64
- : Bfl-S1
- : Yes
- : 4mtr+/-1%
- : Yes
- : No
- : Yes

Matching: This sample may not be from the same batch as current stocks and should be used only as a guide.

Installation: Professional installation recommended and essential to a good quality underlay. Avoid exposure direct sunlight. Areas that might receive prolonged exposure to direct sunlight should be protected by the use of blinds or curtains.

Maintenance: To maintain your carpets appearance it is recommended that it is vacuumed at least three times per week to remove particles of dirt and dust. It should be noted that overtime foot tra c will flatten the pile in main walkways causing areas of differential wear. This can cause the carpet to show areas of light and dark shading, this happens to all quality of velour carpets and would not be accepted as a basis of any complaint.

