



HETEROGENEOUS  
ACOUSTIC VINYL


## I.D. Premier Plain Design

- > 0.7mm wear layer - for very heavy duty applications (also available in 0.55mm wear layer)
- > TopClean XP PUR reinforcement for extreme resistance to abrasion and easy, low cost maintenance
- > Product backing manufactured from recycled material - up to 37%




HETEROGENEOUS  
ACOUSTIC VINYL

# I.D. Premier Plain Design



**Dynamic Red** 0.55mm : 3988 005

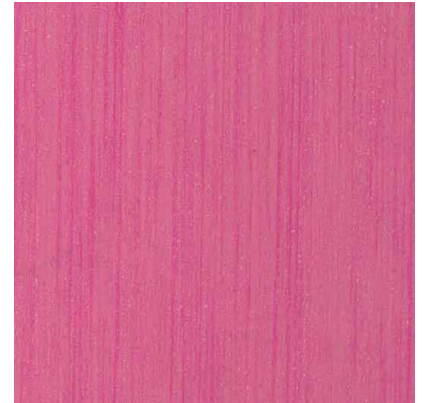

**Pink Emotion** 0.55mm : 3988 009




**Electric Blue** 0.55mm : 3988 007



**Turquoise Boost** 0.55mm : 3988 006



**Acid Green** 0.55mm : 3988 002

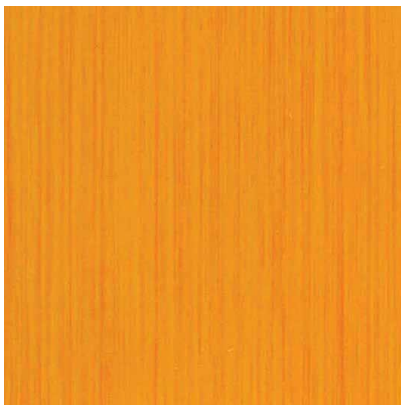

**Vibrant Orange** 0.55mm : 3988 004



**Urban Black** 0.55mm : 3988 008



**Steel** 0.55mm : 3987 028



**Impulse Yellow** 0.55mm : 3988 003

## Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements beside the need for sustainable solutions.



HETEROGENEOUS  
ACOUSTIC VINYL

# I.D. Premier Plain Design

## Specification

Luxury vinyl flooring, with glass fibre reinforcement:

Topclean XPTM polyurethane reinforcement.

In tile form, with bevelled edges.

Product standard: EN 649.

CERTIFICATION & CLASSIFICATION	STANDARDS	I.D. Premier 0.55mm
Type of floorcovering	EN 649	Heterogeneous acoustic vinyl
CE Certification	EN 14041	Yes
Impact sound reduction	EN ISO 140-8 EN ISO 717-2	$\Delta L_{w2}$ dB
Classification	EN 685	Commercial: 33 Industrial: 42

TECHNICAL CHARACTERISTICS	STANDARDS	I.D. Premier 0.55mm
Wear layer thickness	EN 429	0.55mm
PUR Reinforcement		Topclean XP™
Total thickness	EN 428	2.5 mm
Abrasion Group	EN 660-1	Group T
Total Weight	EN 430	3900 g/m <sup>2</sup>
Form of delivery	EN 427 Tiles (box)	Tiles 47.1 x 47.1 cm 18 tiles/box = 4.0m <sup>2</sup>

TECHNICAL PERFORMANCES	STANDARDS	I.D. Premier 0.55mm
Dimensional stability	EN 434	< 0,10%
Reaction to fire	EN 13501-1 EN ISO 9239-1	B <sub>f1</sub> s1 glued over A2 <sub>f1</sub> substrate (concrete) > 8 kW/m <sup>2</sup>
Static indentation	EN 433	≤ 0.05mm
Castor chair	EN 425	No damage
Furniture leg	EN 424	No damage
Curl resultant to heat	EN 434	≤ 2.0 mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV R1 > 10 <sup>10</sup> Ω
Fungi static and bacteria static effect	NF EN ISO 846	Sanitized®
Chemical resistance	EN 423	Good resistance to everyday substances
Thermal resistance	EN 12524	0,03 m <sup>2</sup> K/W
Underfloor heating		Suitable - max 27 <sup>0</sup>
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	DIN 51130	In progress
Colours		26 Stone, 13 Design

The above information is subject to modification for the benefit of further improvement. (02/14).  
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.

