



STEP INTO THE FUTURE


> BE EASY



200
cm




50x50
cm

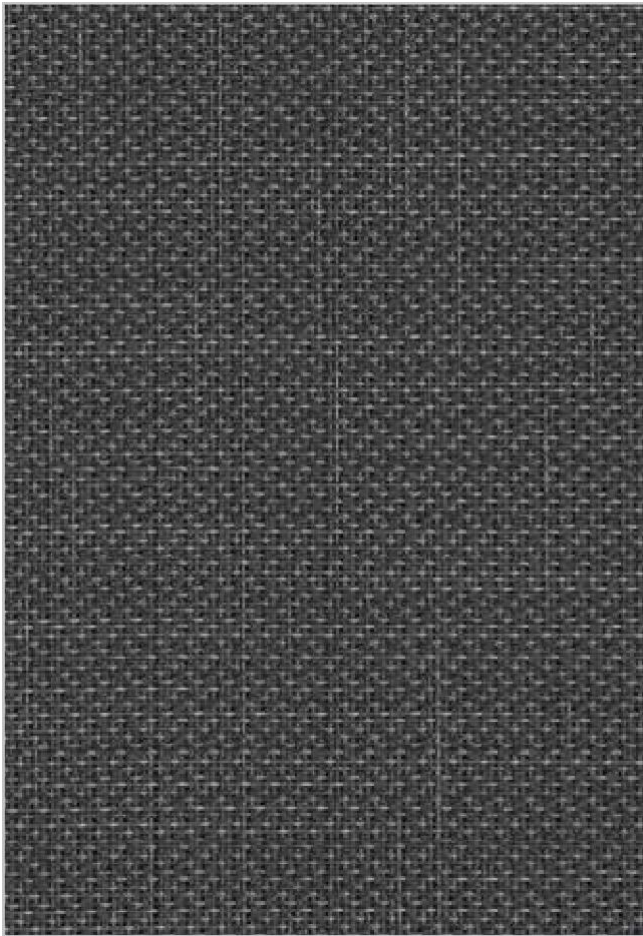

Phantom Grey

 BEA U507 D50
 BEA U507 200

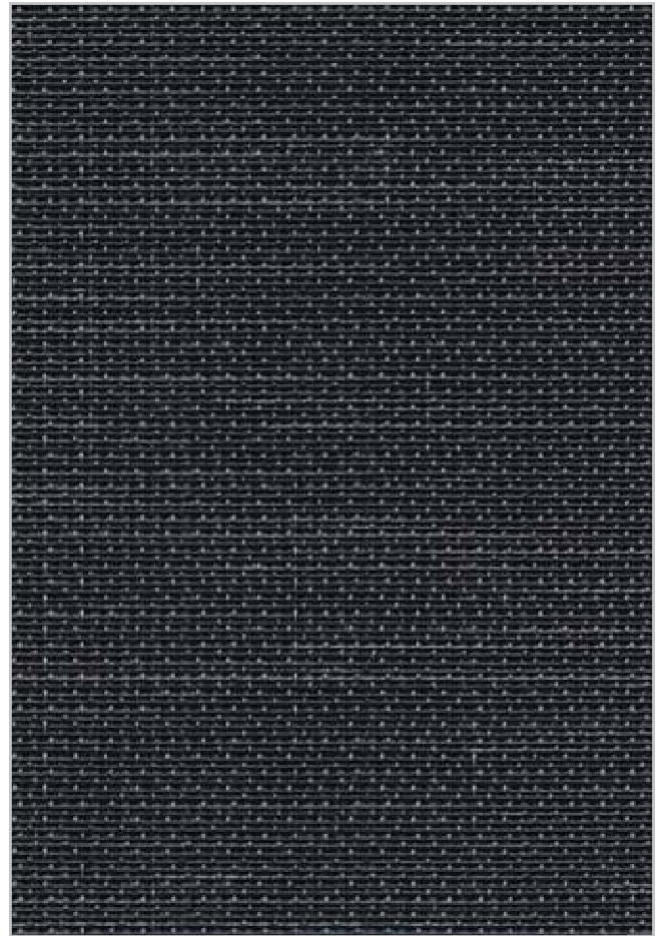

Storm Black

 BEA U508 D50
 BEA U508 200



> BE EASY





200
cm




50x50
cm





Magma Red

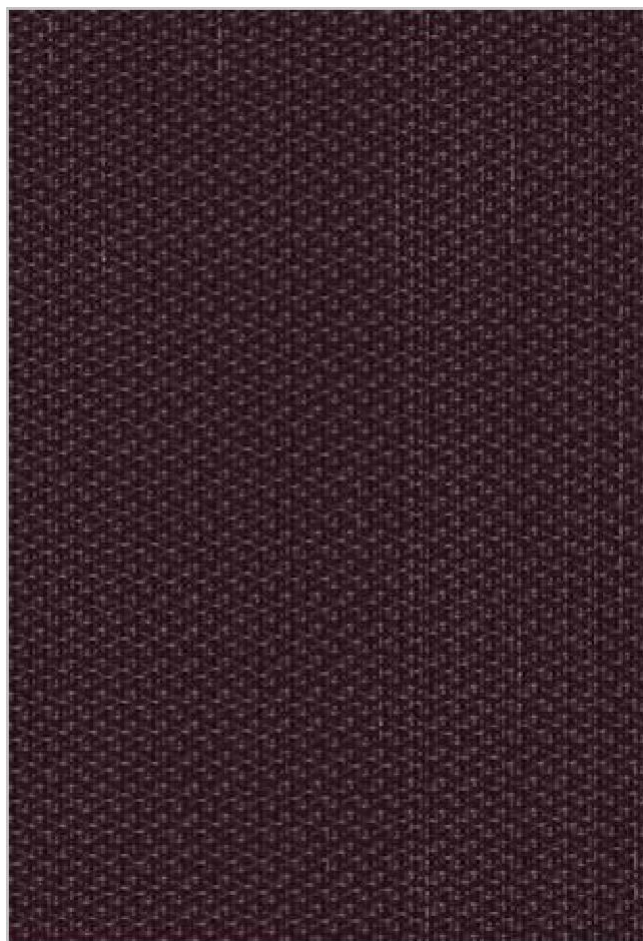 BEA U513 D50
 BEA U513 200



Deep Purple

 BEA U514 D50
 BEA U514 200






200
cm




50x50
cm

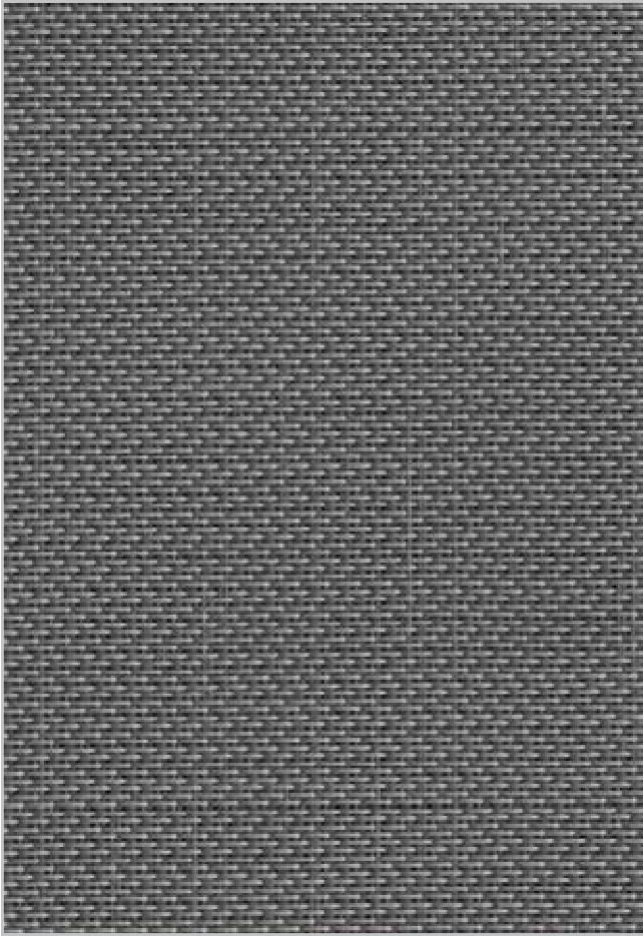


Moon Shadow

 BEA U509 D50
 BEA U509 200

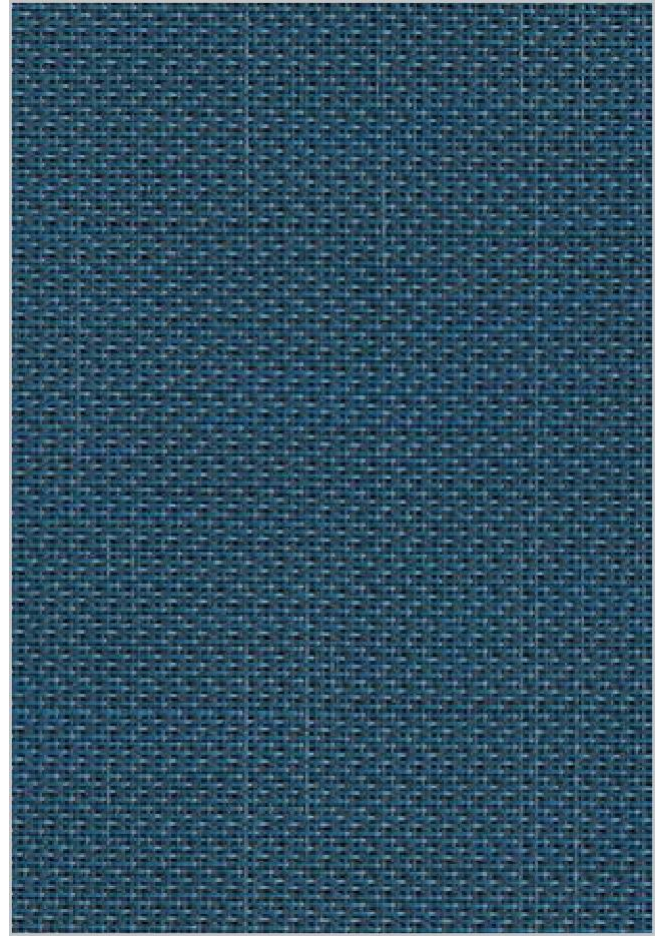




Spectral Blue

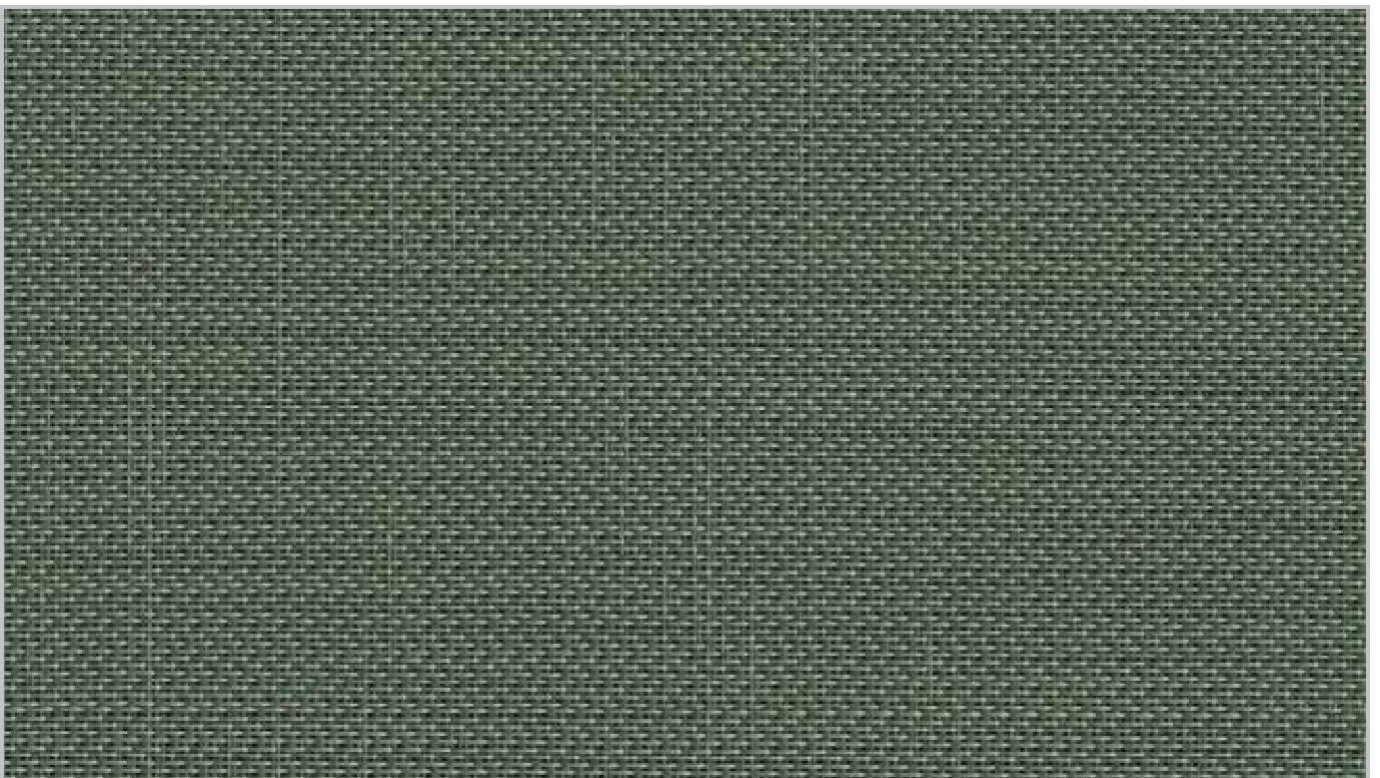 BEA U516 D50
 BEA U516 200



Putting Green

 BEA U515 D50
 BEA U515 200

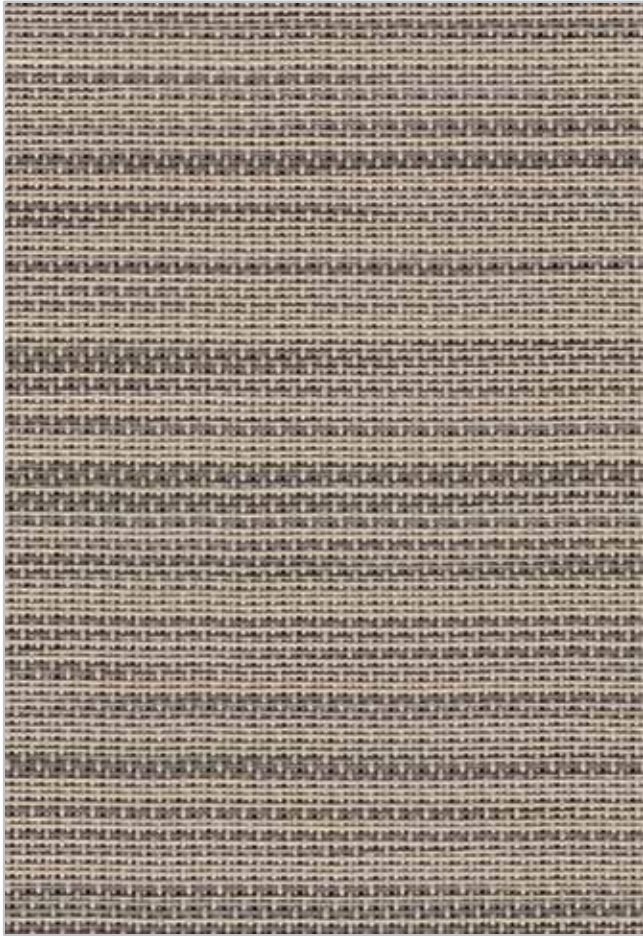

Refinement

 BSM U500 D50



Style

 BSM U502 D50




> BE SMART



Soul

 BSM U503 D50

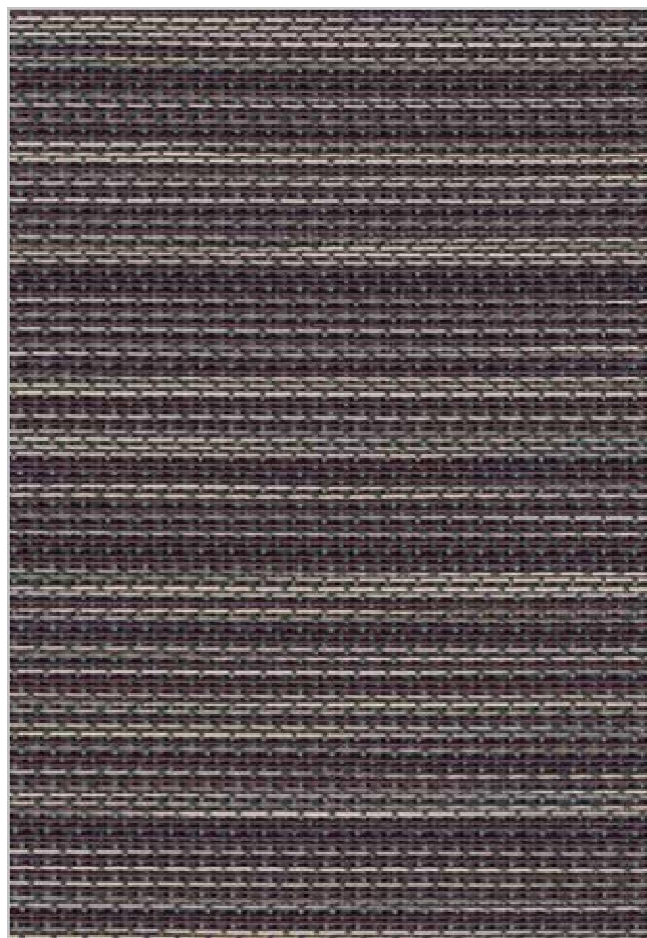











Design




 BSM U504 D50




TECHNICAL INFORMATION

		STANDARD	BE SMART 	BE EASY 
Use classification		EN 685	33 Heavy commercial	33 Heavy commercial
Fire classification		EN 13501-1	Cfl s1	Cfl s1
		ASTM E 648	Class 1	Class 1
Optical smoke density		ASTM E 662	<450	<450
Soundproofing		ISO 140-8	17dB	17dB

Roll width		EN 426		
Roll length				
Tile size		EN 994	50 x 50 cm	50 x 50 cm
			Box of 16 tiles / 4 sq.m.	Box of 16 tiles / 4 sq.m.
Thickness		ISO 1765	3,7 mm	3,7 mm
Weight*		ISO 8543	3,15 kg/m ²	3,15 kg/m ²

Castor chair		EN 985	Continuous use	Continuous use
Body voltage		ISO 6356	< 2kv	< 2kv
Residual indentation		EN 433	<0,2	<0,2
Fraying		EN 1814	Frayproof	Frayproof
Thermal resistance		ISO 8302	Suitable for underfloor heating	Suitable for underfloor heating
Dimensional stability		ISO 2551 / EN 434	<0,1%	<0,1%

Colourfastness to light		ISO 105 B02	8/8	8/8
Colourfastness to weather		ISO 105 B04	8/8	8/8
Slip resistance		EN 13893	$\mu > 0,3$	$\mu > 0,3$

CE Certification		EN 14 041	0493-CPD-0101	0493-CPD-0101
Floorscore Certification (rolls + tiles)		SCS-EC10.2-2007	SCS - FS - 02719	SCS - FS - 02719
Oeko-Tex® Certification		Oeko-Tex 100 (IV)	CQ 638/5	CQ 638/5

*+/- 5%

