



TARKETT
LOCK

Essentials 450

TARKETT
LOOK

Essentials 450




Caligula / White
5203009




Agrego / Grege
5203045



Granite / Carbon
5203058

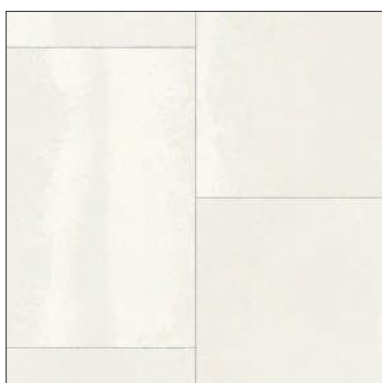

Kaolin / Light Grey
5203091

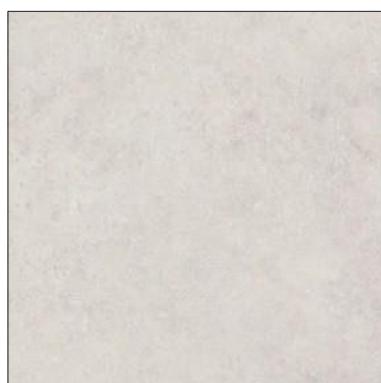

Agrego / White
5203064



Baldosa / Smoke
5203082

TARKETT
LOOK

Essentials 450



Granite / Grege
5203059



Baldosa / Dark
5203083




Baldosa / Porcelian
5203084



Baldosa / Grey
5203085



Kaolin / Tãupe Metallic
5203092

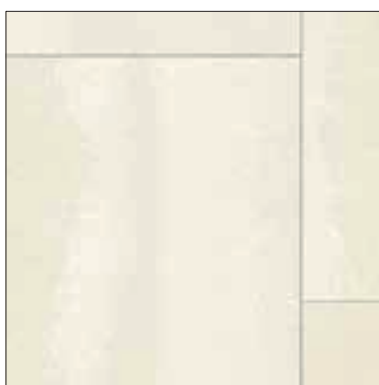


Kaolin / Grege
5203064



Kaolin / Dark Grege
5203082

TARKETT
LOCK

Essentials 450

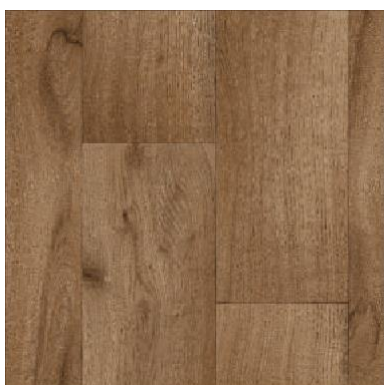

Arcadia / Middle Beige
5203048



French Oak / Medium Beige
5203087



French Oak / Anthracite
5203086



Oak / Dark Beige
5203068



Authentic / Beige
5203069



Arcadia / Beige
5203067

TARKETT
LOCK

Essentials 450



Noyer / Brown
5203057



French Oak / Warm Brown
5203095



Antik Oak / Beige
5203047



Haussmann / Light Grey
5203089



Haussmann / Dark Grey
5203090



Haussmann / Natural
5203088



Essentials 450










Technical data sheet






4.5 mm thick with 0.30 mm wear layer
 Excellent underfoot comfort
 Excellent 20 dB sound reduction
 Extra resistant to scuffs, scratches and stains
 15-year warranty



Vinyl floor Covering	EN ISO 26986
Classes of Use	EN ISO 10874 23  31 

PRODUCT ID							
	Total Thickness	EN ISO 24346	4,50 mm		Impact Sound Absorption	EN ISO 717-2	20 dB
	Wear Layer Thickness	EN ISO 24340	0,30 mm		Residual Indentation	EN ISO 24343-1	≤ 0,35 mm
	Weight	EN ISO 23997	3,000 kg/m ²		Castor Chair	ISO 4918	OK
	Roll Width	EN ISO 24341	4 m		Wear Layer Binder content	ISO 11638	Type I
	Roll Length		19 m				

PRODUCT SAFETY & SECURITY CHARACTERISTICS							
	Slip Resistance	EN 13893 DIN 51130	$\mu \geq 0,30$ R10		Fire Classification	EN 13501-1	Cfl-S1
	Static Electrical Propensity	EN 1815	≤ 2 kV		Chemical Resistance	EN ISO 26987	Not Affected*

PRODUCT ENVIRONMENTAL BEHAVIOR											
	Dimensional Stability	EN ISO 23999	≤ 0,40 %		PHthalate FREE Technology		<100 µg/m ³ Better Indoor Air Quality		100 % 14 % Recyclable Recycled content		EMISSIONS DANS L'AIR INTÉRIEUR A+
	Thermal resistance for underfloor heating	ISO 10456 EN 12524-1	0,07 m ² /kW		*Except recycled content		*TVOC AT 28 DAYS				
	Light Fastness	EN ISO 105 B02	≥ 6								

*For short-term exposure of dilute acids, oils and fats, no change in the material properties.