




Web: fixitdesign.ae

Phone: [+971554722980](tel:+971554722980)

Email: info@fixitdesign.ae

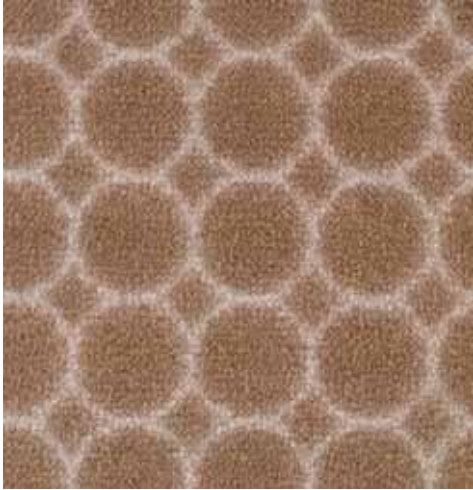

Capsule 630



Ginkgo 760



Opus 880



Folio 980



Bridge 980



Small 990



Small 340




Small 620



Small 560

UPEC
CSTB
U3P3E1C0
12/289



Structure Construction Herstellungsvorhaben Fabricagemetode Descripción Struttura Struktura	Moquette à velours Saxony Tufted carpet, Saxony Getufteter Saxony Velours BGetuft tapijt, Saxony Moqueta de fibra Saxony Moquette velluto Saxony Wykładzina o runie typu welur Saksonski	Envers Backing Rückenausstattung Rug Soporte Sottofondo Podkład	Double dossier Action back Textilrücken Textielrug Doble soporte textil Doppio supporto Action back	Largeur à la pièce Width in Roll Lieferbreite in Rolle Roibreedte Ancho por pieza Larghezza rotolo Szerokosc w rolce	4m			
Composition Pile material Polmaterial Poolmateriaal Composición Composizione Skład runa	100% Polyamide 100% Polyamid 100% Polyamid 100% Polyamide 100% Poliamida 100% Poliammide 100% Poliamid	Comportement au feu Fire resistance Brennverhalten Brandgedrag Clasificación al fuego Comportamento al fuoco Trudnozapalnosć	Cfl-s1 - collé sur ciment Cfl-s1 - glued on cement Cfl-s1 - geklebt auf Zement Cfl-s1 - verlijmd op cement Cfl-s1 - pegado en cemento Cfl-s1 - incollato su cemento Cfl-s1 - klejone na podlozu betonowym	Largeur à la coupe Width in Cut-length Lieferbreite in Coupon Couponbreedte Ancho por trozo Larghezza taglio Szerokosc w kuponie	4m			
Poids de velours Pile weight Poleinsatzgewicht Poolinzetmassa Peso fibra Peso felpa Gramatura	1200 g/m²	Classement Wear Classification Beanspruchung Gebruiksklasse Clasificación Classificazioni Klasyfikacja	U3SP3E1C0 Classe 23/33 LC4 PRODIS N° C96F6EBD GUT N° 18592 AgBB N° Z 156 601 591	Nombre de coloris Colours Erhältliche Farben Kleurenaantal Cantidad de colores Numero colori Liczba kolorow	10			
Poids total - NF ISO 8543 Total weight Gesamtgewicht Totaal gewicht Peso total Peso totale Masa calkowita	2200 g/m²	HQE HQE HQE HQE HQE HQE HQE	Ce produit répond parfaitement à 8 des 14 cibles This product meets perfectly 8 from the 14 targets Dieses Produkt erfüllt 8 von den 14 Zielen Dit product beantwoordt aan 8 van de 14 doelstellingen. Este producto responde perfectamente a 8 de los 14 objetivos Questo prodotto risponde perfettamente a 8 di 14 target Ten produkt odpowiada 8 z 14 kryteriow	Pose / Entretien / Traitement Laying / Cleaning / Treatment Verlegehinweis / Reinigung / Behandlung Plaatsinstructie / Reiniging / Onderhoud Instalación / Mantenimiento / Tratamiento Posa / Manutenzione / Trattamenti Układanie / Utrzymanie w czystosci / Impregnacja	www.balsan.com			
Epaisseur totale - NF ISO 1765 Total thickness Gesamtdicke Totale massa Altura total Spessore totale Wysockosc calkowita	8,5 mm	Isolation aux bruits d'impacts - NF EN ISO 140-8 Impact sound insulation Trittschalldämmung Geluidsreductie Aislamiento a los ruidos de impactos Rumore all'impatto Izolacja halasu uderzeniowego	ΔLw 30 dB					
Hauteur du velours - NF ISO 1766 Pile height Polhöhe Poolhoogte Altura fibra Spessore felpa Wysockosc runa	6,2 mm	Absorption aux bruits aériens - NF EN ISO 11654 Sound absorption Schallabsorptionsgrad Geluidsabsorptie Absorción de los ruidos aéreos Isolazione acustica Pochlanianie dzwieku	α 0,25					
Jauge - Serrage (points) - Densité - NF ISO 1763 Gauge - Rows (points) - Tufts Teilung - Stiche (points) - Noppenzahl Rijen - Deling (points) - Noppenaantal Galga - Densidad (puntos) Scartamento - Serraggio (punti) - Densità felpa Zaciesnienie - rozstaw igiel (punkty) - Gestosc	1/10 47p 189600 p/rtf	f/Hz α S	125 0,01	250 0,05	500 0,13	1000 0,31	2000 0,58	4000 0,57