

Omnisports

V35, V50, V65 &
V120

Let's
play



Web: fixitdesign.ae
Phone: [+971554722980](tel:+971554722980)
Email: info@fixitdesign.ae

OMNISPORTS, ENJOY PLAYING, BE PROTECTED

> ENSURE PURE SURROUNDINGS

- Guarantee a **healthier environment** thanks to **Phthalate-free technology**.
- Provide cleaner air for optimum physical exercise.
- Avoid harm to lungs during exercise thanks to **extremely low VOC emissions**.
- Help prevent adverse effects to children's health: **Certified asthma & allergy friendly** in the US.

> PLAY SAFE

- **Help prevent injury** with integrated cushion for protection in the case of a fall.
- **Reduce long-term impact** and injury:
 - Adapted **shock absorption levels** for all ages, weights and levels of play.
- **Protect players** against potential friction burn.

1

BETTER PROTECTION

3

EASY TO MAINTAIN & DURABLE

- **Benefit from resistance to stains and scratches** during daily use.
- Appreciate **high resistance to indentation marks** and rolling load.
- Reduce maintenance costs by 30%:
 - TopClean XP™ engineered surface treatment.
- Choose Greenlay installation option:
 - **20% time reduction**
 - **98% adhesive free**
 - **Easy removal**
- 10 year warranty.

MORE COMFORT & PLEASURE

2

- Guarantee **good underfoot comfort**.
- Reduce noise levels thanks to **cushion vinyl acoustic**.
- Allow for personalised installations with a choice of 22 colours.
- Boost children's energy levels with **vibrant colours**.

4

HIGHER PERFORMANCE

Choose the right product for your facility, from practice in schools to competition level.


- Enhance sports performance thanks to **good energy return**.
- Guarantee an **adequate & consistent level of ball bounce** for handball, basketball, futsal and other sports.
- Provide a **better grip** when sliding.
- **Reduce fatigue** throughout sports practice.




HETEROGENEOUS VINYL

OMNISPORTS

SPORTS FLOORING SOLUTIONS TO MEET ALL YOUR NEEDS

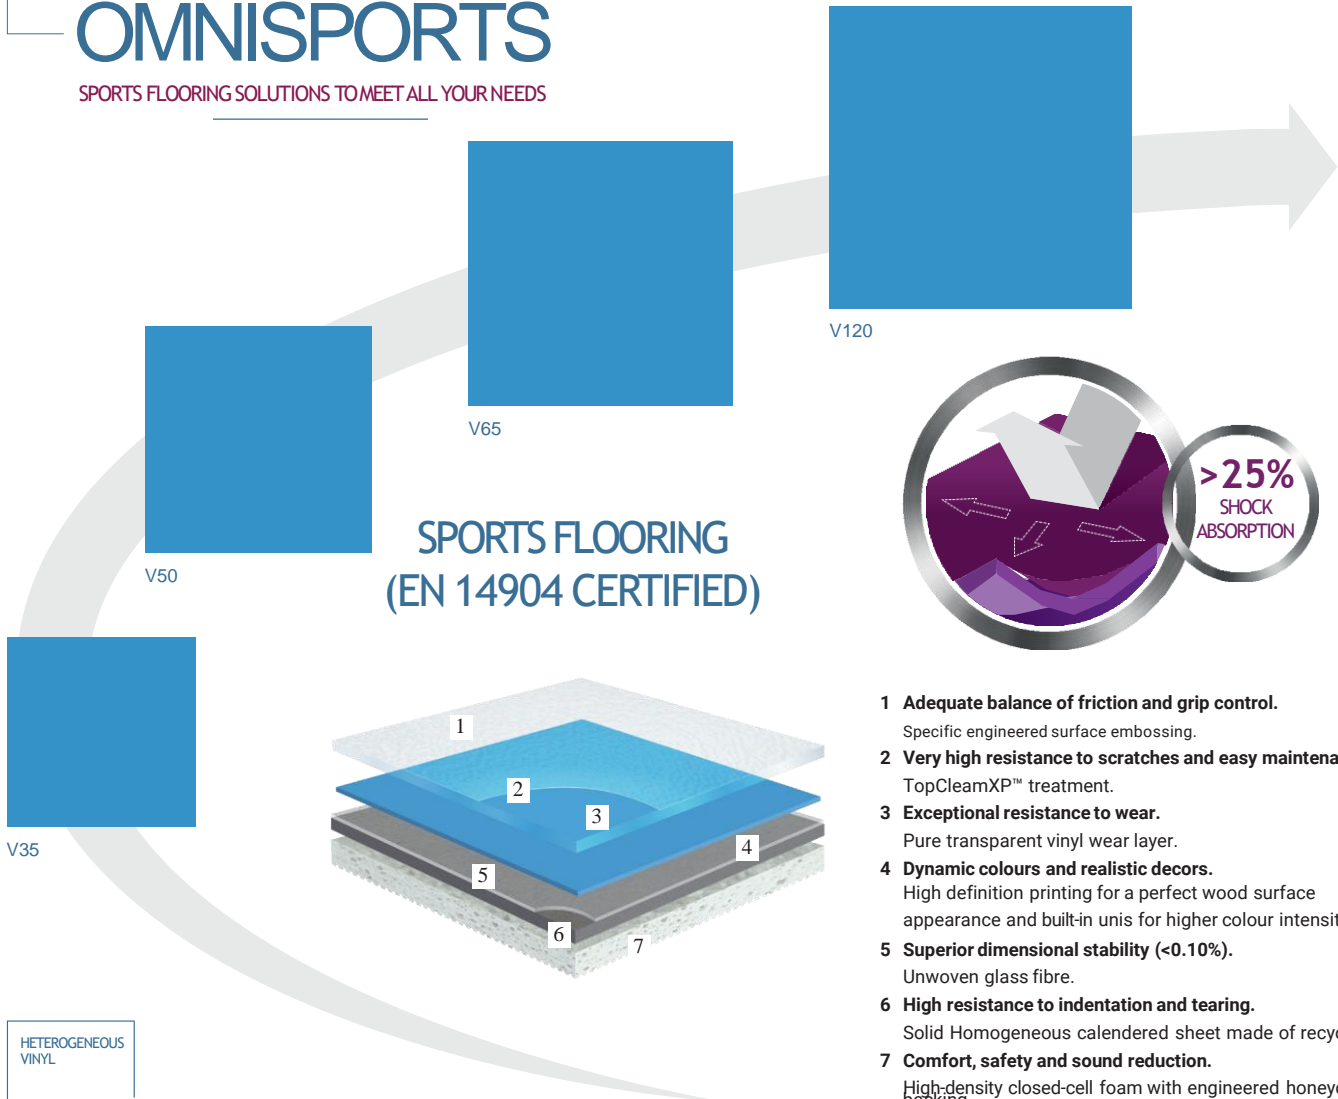


SPORTS FLOORING
(EN 14904 CERTIFIED)

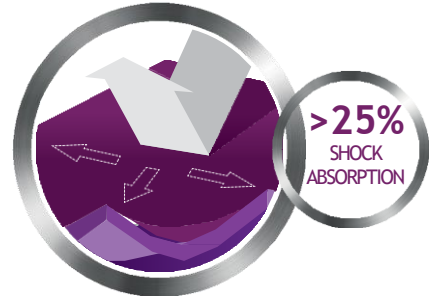

- 1 Adequate balance of friction and grip control.**
Specific engineered surface embossing.
- 2 Very high resistance to scratches and easy maintenance.**
TopCleanXP™ treatment.
- 3 Exceptional resistance to wear.**
Pure transparent vinyl wear layer.
- 4 Dynamic colours and realistic decors.**
High definition printing for a perfect wood surface appearance and built-in unis for higher colour intensity.
- 5 Superior dimensional stability (<0.10%).**
Unwoven glass fibre.
- 6 High resistance to indentation and tearing.**
Solid Homogeneous calendered sheet made of recycled vinyl.
- 7 Comfort, safety and sound reduction.**
High-density closed-cell foam with engineered honeycomb backing.

HETEROGENEOUS VINYL

OMNISPORTS V120 (12 mm)

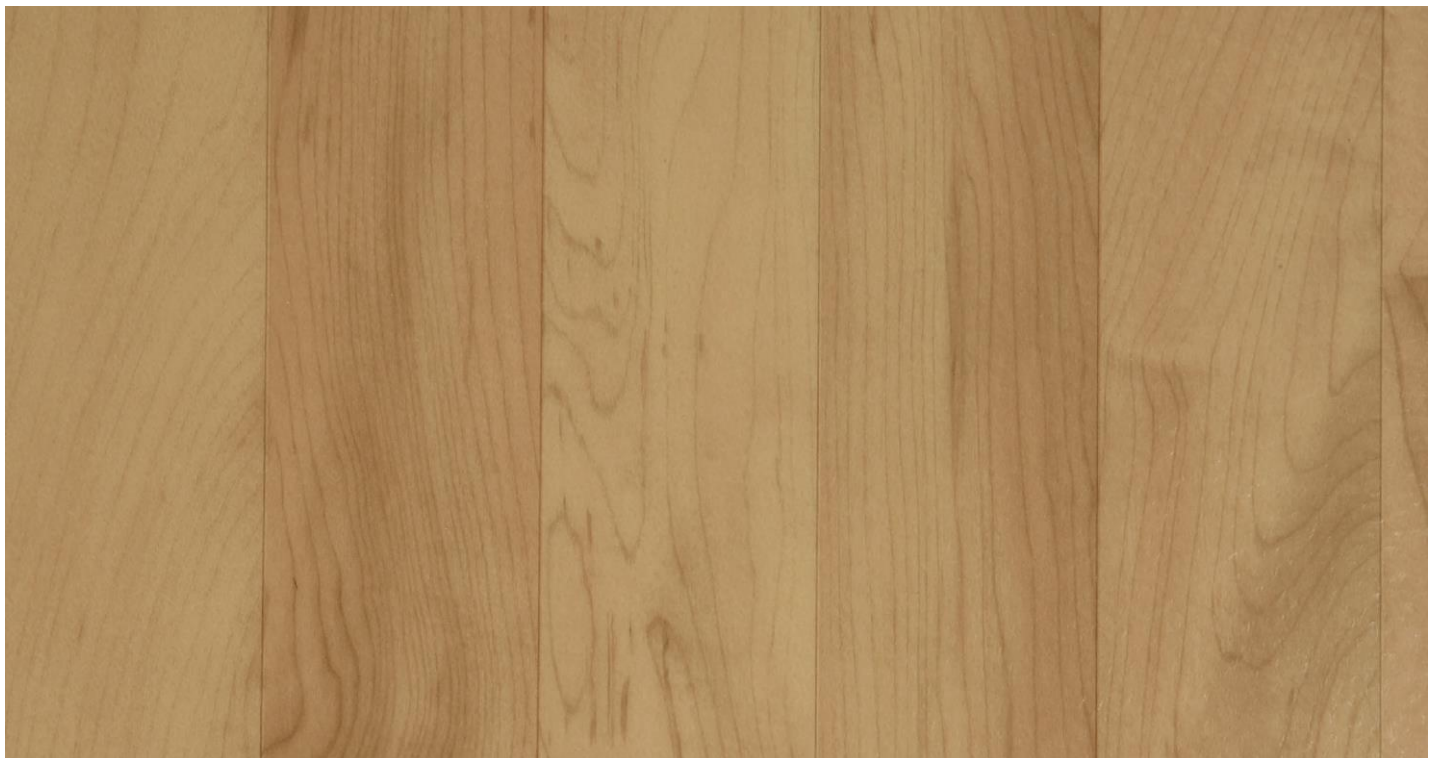

Maple -200163010

HETEROGENEOUS
VINYL

OMNISPORTS V35 (3.5 mm)



Yellow -200157006



Orange -200157007



Red -200157005



Coral -200157013



Sky Blue -200157004



Royal Blue -200157003




Field Green -200157001




Teal -200157012



Grey -200157008

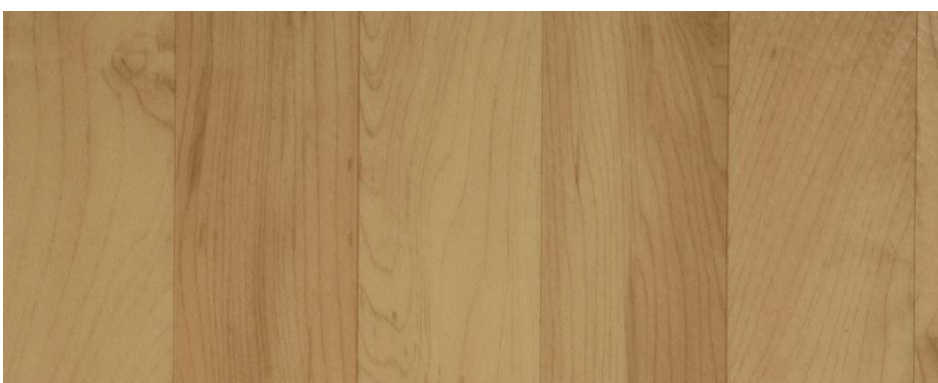

Maple -200157010



Black -200157009

HETEROGENEOUS
VINYL

OMNISPORTS V50 (5 mm)



Yellow -200159006



Orange -200159007



Red -200159005



Grey -200159008



Sky Blue -200159004




Royal Blue -200159003




Forest Green -200159002



Maple -200159010

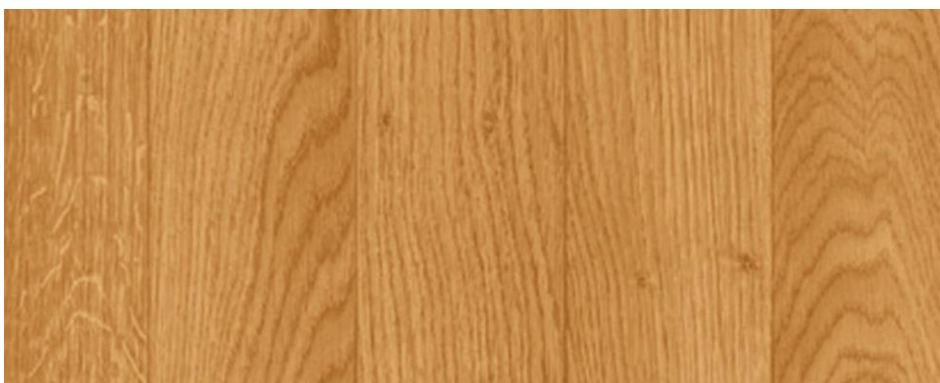

Classic Oak -200159011

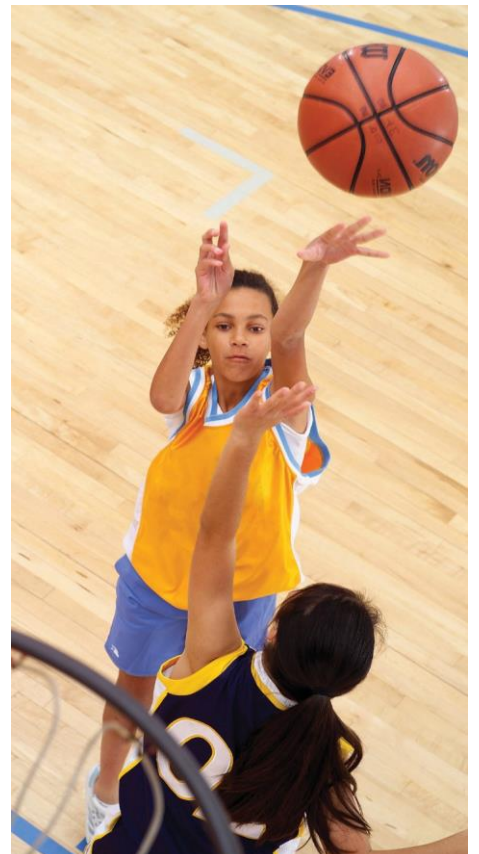

HETEROGENEOUS
VINYL

OMNISPORTS V65 (6.5 mm)



Yellow -200160006



Orange -200160007



Red -200160005



Field Green -200160001



Sky Blue -200160004





Royal Blue -200160003



Grey -200160008



Black -200160009

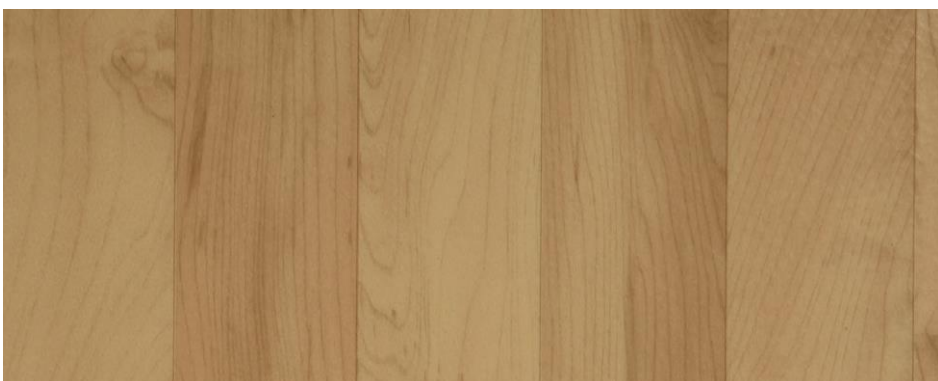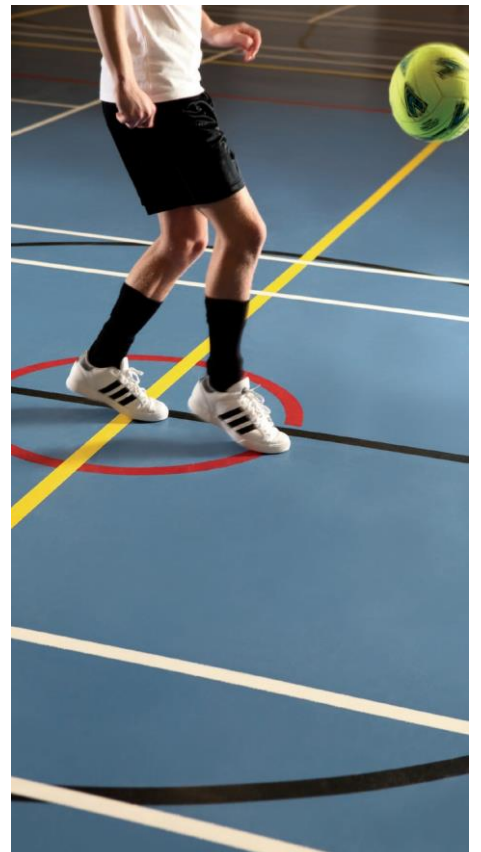

Maple -200160010

TECHNICAL / MARKETING PRODUCT CHARACTERISTICS

PVC Sports floor covering	Standard	V35	V50	V65	V120
Product Characteristics					
Total thickness	EN 428	3.45 mm	5 mm	6.5 mm	12 mm
Wear layer thickness	EN 429	0.65mm	0.5 mm	0.7 mm	0.8 mm
Weight	EN 430	3.160 kg/m ²	3.600 kg/m ²	4.300 kg/m ²	6.800 kg/m ²
Surface treatment-additional PU protection		Top Clean XP	Top Clean XP	Yes	Top Clean XP
Surface treatment-chemical / mechanical embossing		Normal	Normal	Normal	Normal
Hygiene		Does not Contribute to infection spreading	Does not Contribute to infection spreading	Does not Contribute to infection spreading	Does not Contribute to infection spreading
TVOC after 28 days	ISO 16000	< 100 µg/m ³	< 100 µg/m ³	< 100 µg/m ³	< 100 µg/m ³
Reduction of Impact Sound Insulation	ISO 140-8/ISO 717-2	> 18	> 18	> 18	> 18
Marketing Characteristics					
Hygienic attest	-	Pass	Pass	Pass	Pass
Roll length	EN 426	20.5 m	20.5 m	20.5 m	15 m
Roll width	EN 426	2 m	2 m	2 m	2 m
Branded		Tarkett	Tarkett	Tarkett	Tarkett
Back printing		Yes	Yes	Yes	Yes
Back embossing		Yes	Yes	Yes	Yes
Guarantee, Year		10 yrs	10 yrs	10 yrs	10 yrs
Installation Method					
Loose lay, double-sided adhesive tape		≤ 25 m ²	≤ 25 m ²	≤ 25 m ²	≤ 25 m ²
Adhesive		> 25 m ²	> 25 m ²	> 25 m ²	> 25 m ²

TARKETT PRODUCT CHARACTER

ISTICS

Vertical deformation	EN 14809	0.06	≤ 5.0	1.1	2.0
Vertical ball rebound	EN 12235	99	≥ 90	98	96
Friction	EN 13036-4	90	90 - 110	92	82
Dimensional stability after exposure to heat	EN ISO 23999	≤ 0.04	≤ 0.04	≤ 0.04	≤ 0.04
Curling after exposure to heat	EN ISO 23999	≤ 8	≤ 8	≤ 8	≤ 8
Light resistance	105-B02	Resistant	Resistant	Resistant	Resistant
Chemical resistance	EN ISO 5470-1	0.3	≤ 1.0	0.13	0.09
Resistance to wear	26987	17	≤ 30	21	
Resistance to specular gloss	EN ISO 2813	No		No	No
Resistance to indentation	PN-EN 1569	Damage	No Damage	Damage	Damage
Resistance to impact	EN 1517	No	<	No	No
Resistance to a rolling load	NF EN 1516	Damage	0.50	Damage	Damage
Resistance to impact	-	0.04	27°C	0.26	0.5
Resistance to indentation	-	27°C		27°C	27°C
Possibility to install in rooms with floor heating	NF EN 14808	Cfs1	Cfs1	29	45
Shock absorption	EN 13501-1	Cfs1		Cfs1	Cfs1
Fire resistance					