

Tapiflex Excellence 65 Uni

2017 - 2018

ACOUSTIC HETEROGENEOUS VINYL





Medium Grey 25016 **017**




Grass Green 25016 **009**



Lemon Yellow 25016 **019**



Dark Blue 25016 **029**

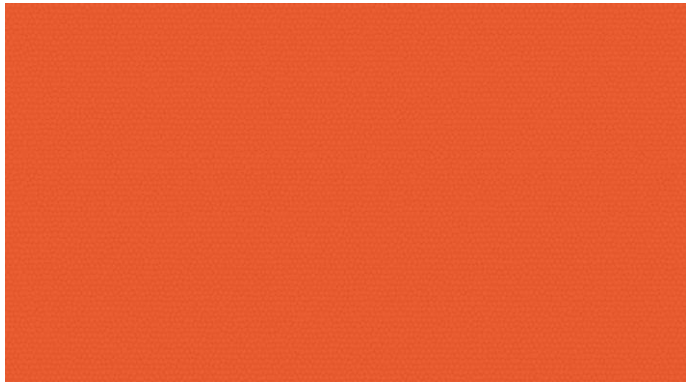


Orange Red 25016 **000**



Medium Blue 25016 **001**



Dark Red 25016 **010**

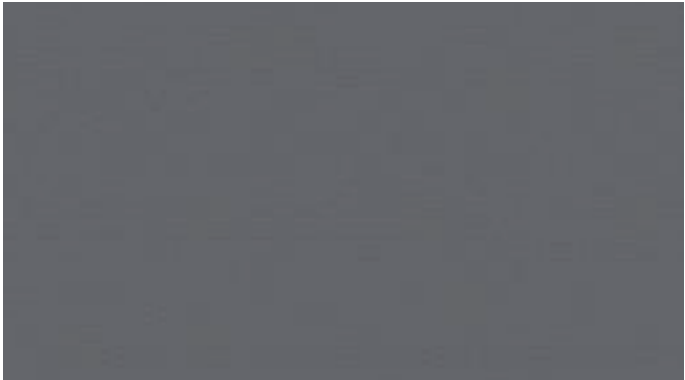


Dark Grey 25016 **016**



Dark Beige 25016 **018**



Aubergine 25016 **004**

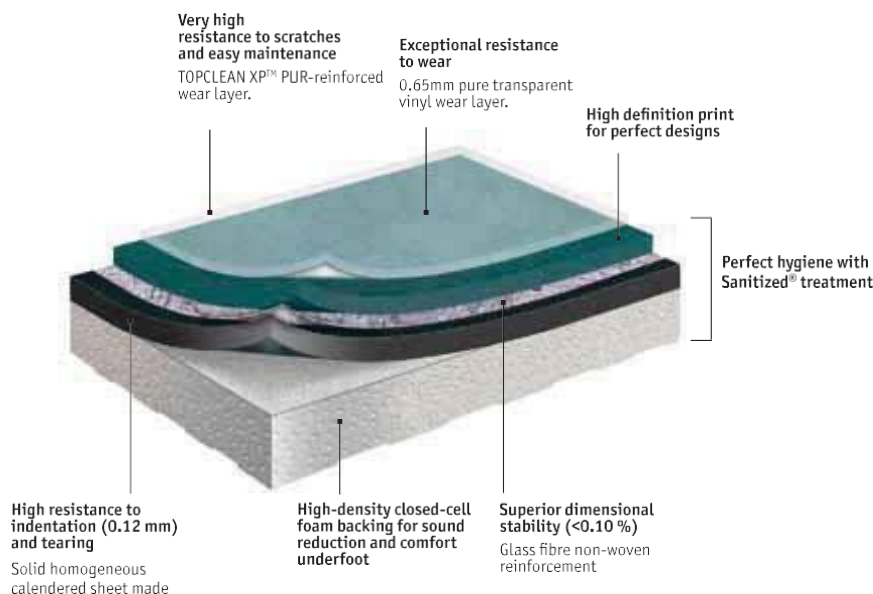

HETEROGENEOUS
ACOUSTIC VINYL

**Tapiflex
Excellence 65
Uni**

Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements beside the need for sustainable solutions.

Sustainable product lines



Tapiflex Excellence and Acczent Excellence are solid evidence of Tarkett's environmental actions.

- Tapiflex and Acczent Excellence are designed with strong environmental concern, from production to disposal.
- They offer eco-friendly properties, thanks to their easy and low cost maintenance and the reduced need for water, energy, and detergents.

+50%
natural raw
materials

+20%
recycled
material

100 %
recyclable

ISO 14001-certified
manufacturing
plant

■ Great acoustic properties with Tapiflex Excellence

With its foam backing the acoustic efficiency of Tapiflex Excellence is **19 dB**. Its unique structure **made of recycled vinyl** offers high indentation resistance (0.12 mm). Its pure vinyl top layer is reinforced with our **TOPCLEAN XP™** polyurethane treatment that increases its resistance to abrasion and scratches. The **Sanitized** treatment is also applied. The **TOPCLEAN XP™** treatment also eliminates wax or polish for life, which significantly reduces maintenance costs.



Mint

25016 003



Pink

25016 014

HETEROGENEOUS
ACOUSTIC VINYL

Tapiflex Excellence 65 Uni

Specification

Tapiflex Excellence 65

Printed acoustic vinyl floor covering with high density foam backing on a glass fibre stabilized carrier, filler free wear layer.

PUR reinforcement, built in fungistatic and bacteriostatic Sanitized® treatment.

Product standard: EN 651

| CERTIFICATION & CLASSIFICATION | STANDARDS | Tapiflex Excellence 65 Uni |
|---|--------------------------------|--|
| Type of floorcovering | EN 651 EN 649 | Heterogeneous Acoustic Vinyl |
| CE certification | EN 14041 | Yes |
| UPEC classification | | U4P3E2/3C2* |
| Impact sound reduction | EN ISO 140-8 EN ISO 717-2 | ΔL_w 19 dB |
| Acoustical improvement | NF S31-074 | $L_{n,e,w}$ = 61 dB |
| NF UPEC. A+ certificate | NF 189 | *Registration in progress ref n°10.4020/1 & 2 since 25/02/2011 (valid one year) |
| Classification | EN 685 | 34 |
| TECHNICAL CHARACTERISTICS | STANDARDS | Tapiflex Excellence 65 Uni |
| Wear layer thickness | EN 429 | 0.65 mm |
| Surface treatment | | TopClean XP |
| Total thickness | EN 428 | 3.45 mm |
| Abrasion group | EN 660-1 | Group T : $\leq 0,08$ mm |
| Total weight | EN 430 | 3 240 g/m² |
| Form of delivery | EN 426 Sheet (rolls) | approx. 23 running metres x 200 cm |
| TECHNICAL PERFORMANCES | STANDARDS | Tapiflex Excellence 65 Uni |
| Dimensional stability | EN 434 | < 0.10% |
| Reaction to fire | EN 13501-1 | B _{f1} s1 on fibrecement substrate A2 _{f1} C _{f1} s1 on woodchip substrate |
| Static indentation | EN 433 | 0.12 mm |
| Castor chair | EN 425 | No damage |
| Underfoot comfort | EN 433 | ≥ 0.40 mm |
| Furniture leg | EN 424 | No damage |
| Curl resultant to heat | EN 434 | ≤ 8 mm |
| Electrostatic properties | EN 1815 EN 1081 EN 14041 | < 2 kV $R_1 > 10^{10} \Omega$ Antistatic on concrete |
| Fungi static and bacteria static effect | NF EN ISO 846 | Sanitized® |
| Chemical resistance | EN 423 | High resistance |
| Thermal resistance Underfloor heating | EN 12524 | 0,05 m² K/W Suitable |
| Light fastness | EN ISO 105-B02 | $\geq 6/8$ |
| Slip resistance | DIN 51130 EN 13893 | R9 $\geq 0,3$ |
| Colours | | 12 |

The above information is subject to modification for the benefit of further improvement. (05/14).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed.

