

PREMIUM
VINYL

TARKETT FORCE


commercial vinyl

The champion of durability.


MAISON 1

PREMIUM
VINYL


TARKETT FORCE

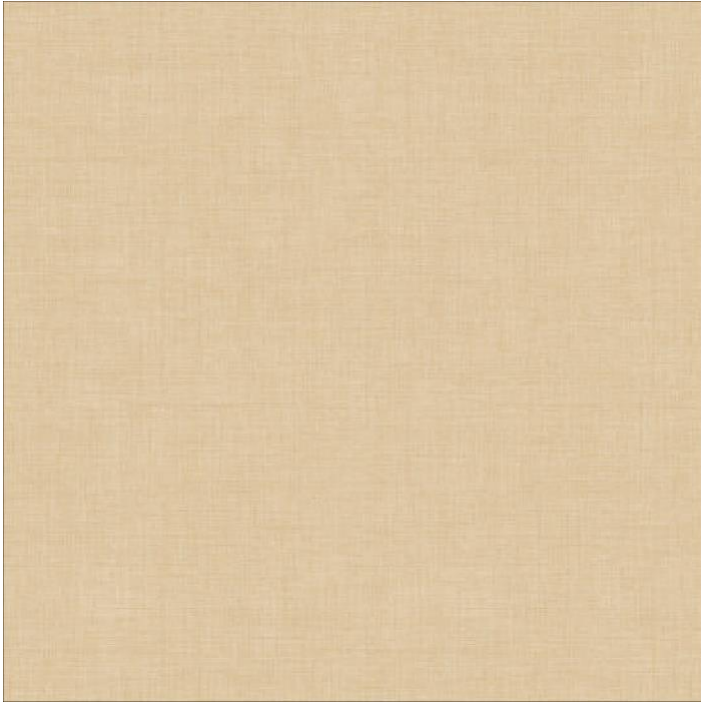


TISSE 1

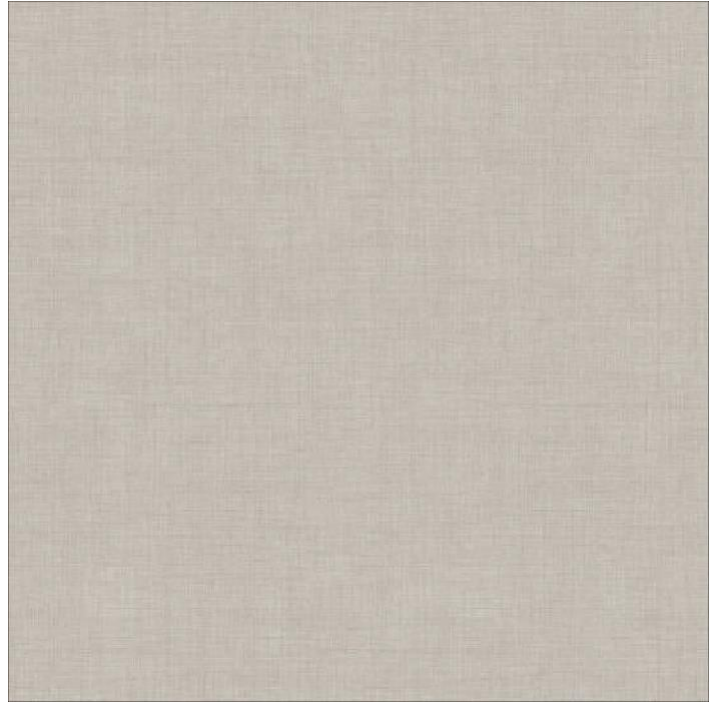

TISSE 2

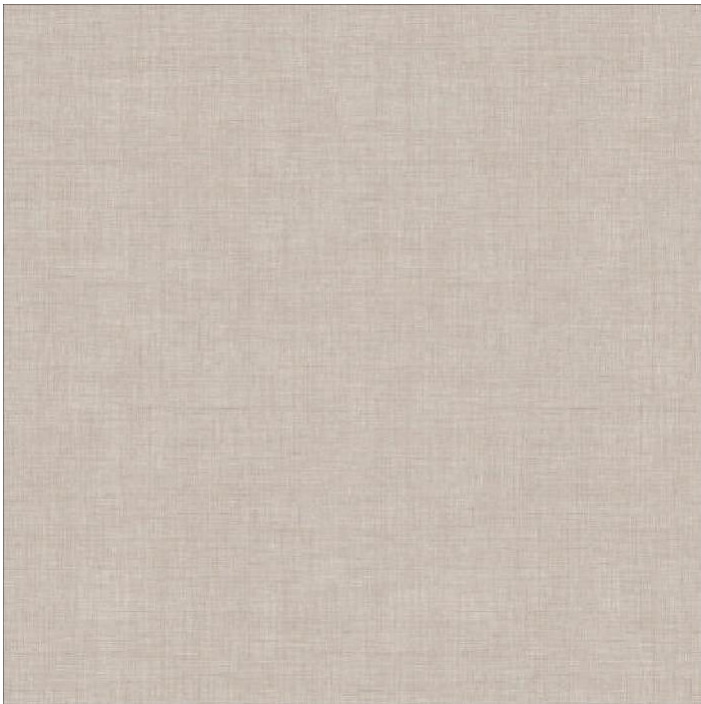


TISSE 3

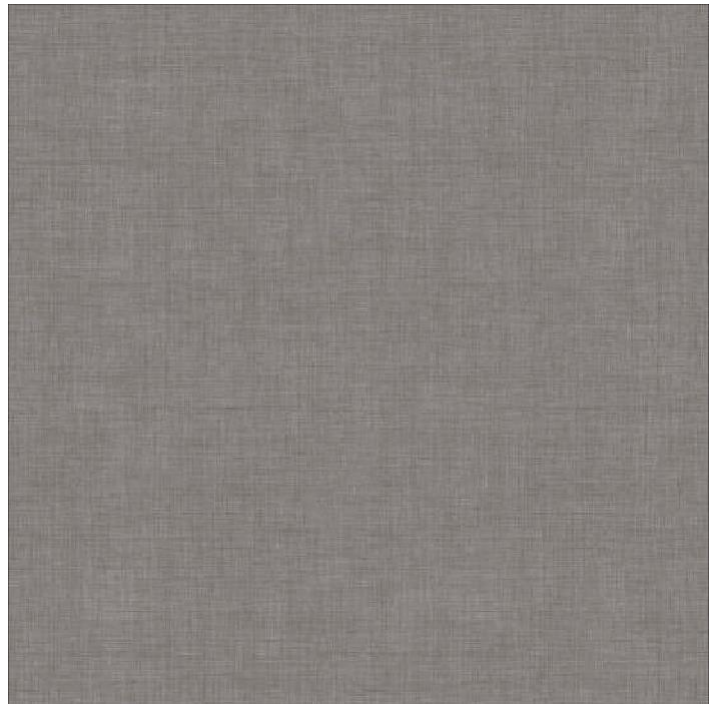

TISSE 4

PREMIUM
VINYL

TARKETT FORCE

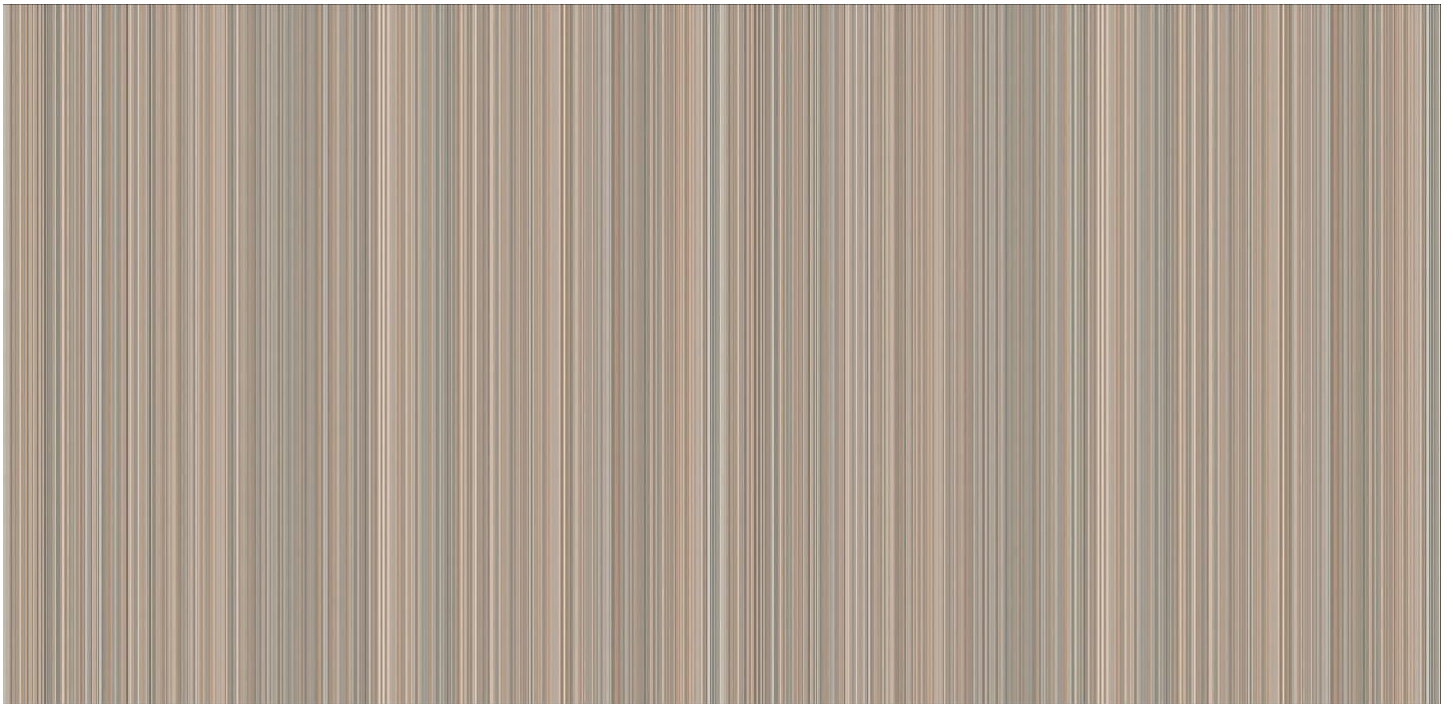

LINEA4

PREMIUM
VINYL

TARKETT FORCE



CANVAS 1



CANVAS 2



SAMBA 12



MOMBASSA 2

PREMIUM
VINYL

TARKETT FORCE



MAISON 1



MAISON 2

PREMIUM
VINYL

TARKETT FORCE



SORBONA 6



CANASTA 3



JAMAICA 3



CANASTA 6

PREMIUM
VINYL

TARKETT FORCE

CERTIFICATION AND CLASSIFICATION

Type of flooring	EN 653		Force
CE certification			Resilient residential PVC floor covering
Classification	ISO 10874		yes
			Residential: 23 Commercial: 33

TECHNICAL CHARACTERISTICS

STANDARD

Force

Extreme protection PUR reinforcement			yes
Total thickness	ISO 24346		2,50 mm
Wear layer thickness	ISO 24340		0,60 mm
Total weight	ISO 23997		2,5 kg/m ²
Form of delivery - Rolls	ISO 24341		30 lm (15-30lm) x 2,5/3m 25 lm (15-25lm) x 3,5m 22 lm (15-22lm) x 4m
Wear layer binder content			Type I

TECHNICAL PERFORMANCES

STANDARD

Force

Dimensional stability	ISO 23999		≤ 0,1%
Reaction to fire	ISO 13501-1		Bfl - s1; report N° RA08-0414
Residual indentation	ISO 24343-1		≤ 0,20 mm
Impact sound reduction	ISO 717/2		10 dB
Underfloor heating			Suitable provided that the surface of the subfloor does not exceed 27°C
Fungi and bacteria resistance			Does not contribute to infection spreading
Castor chair test	ISO 4918		Excellent
Light fastness	ISO 105 B02 -Method 3		7/8
Thermal resistance	DIN 52612		0,03-0,04 m ² K/W

